

AND
Discover Precision

2021/22

Weighing & Inspection
Product Catalogue

Prices are effective from April 2021



Table of Contents

LABORATORY & ANALYTICAL BALANCES

HR-AZ / GR Series	4
GH / GX-AE Series	5
BM Series	6
FX-i / FX-iWP Series	7
FZ-i / FZ-iWP Series	8
GX Series	9
GX-A / GF-A Series	10
GX-K / GF-K Series	11
GP Series	12

COMPACT BALANCES

HT-120 / HT Series	13
HT-CL Series	14
EJ Series	15
EW-i Series	16
EK-i Series	17
EK-L Series	18
SJ-HS Series	19
SJ-WP MK2 / SJ-WP BT Series	20
SK-WP / HL-WP Series	21

INTRINSICALLY SAFE SCALES

EK-EP / HV-CEP Series	23
-----------------------	----

INDUSTRIAL, HEAVY DUTY & WAREHOUSE SCALES

EM Series	24
FG Series	25
HVW-C / HVW-CP Series	26
HV-CWP Series	27
SE Series	28
SC Series	29
SW Series	30
FS-Ki Series	31
SA Series / Baseworks	32
AD-300 / AD-600 Series / SD-200	33
ELP-700 / ELP-1200 Pallet Scale	34
A&D 3000 Pallet Scale	35
ELP-3000 Pallet Scale	36
OHT Scale	37

INDICATORS

AD4401A / AD4402 / AD4404	38
AD4405 / AD4406A / AD4407	39
AD4408 / AD4410 / AD4329	40

Table of Contents

INDICATORS

41	AD4430A / AD4430B / AD4430R
42	AD4530 / AD4531A / AD4531B
43	AD4532B / AD4541-V/I
44	FSi-D / SW-D / SC-D

COUNTING & RETAIL BENCH SCALES

45	HC-i Series
46	FC-i / FC-Si Series

X-RAYS, CHECKWEIGHERS & METAL DETECTORS

48	Custom Checkweighers / Carton Rollers
49	ProteX X-Ray
50	Intelligent Checkweigher 600g / 2kg / AD-4413-CW
51	Intelligent Checkweigher 6kg
52	Metal Detectors AD-4971
53	Metal Detectors AD-4976

LABEL PRINTERS & SOFTWARE

54	Thermal Printers & WinCT Software Guide
----	---

PERIPHERALS & BLUETOOTH CONNECTIVITY

55	AD1683 / AD-720Di / Remote Displays / AD8922A
56	AD1688 / AD8527 / AD1687 / AD1691
57	BT Adapters / BT Converters / AD8931 / RS232 USB
58	BT Connectivity Product Guide

TESTING & ANALYTICAL INSTRUMENTS

59	Moisture Analysers
60	Viscometers
61	RV Rheometer
62	Pipette Testers / Density Kits
63	MC Series
64	AD-4212A / AD-4212B System
66	AD-4212C / AD-4212L / AD-4212D System

HEALTH, PROFESSIONAL & PERSONAL SCALES

68	Professional / Personal Scales
----	--------------------------------


SELECTION GUIDE & SERVICE CONTACT DETAILS

71	Selection Guide
----	-----------------




HR-AZ & GR Series

Compact Analytical Balances

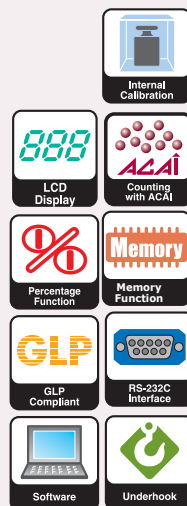

Network Capability

With Option 08 Ethernet Interface or Ethernet Adapter AD-8526

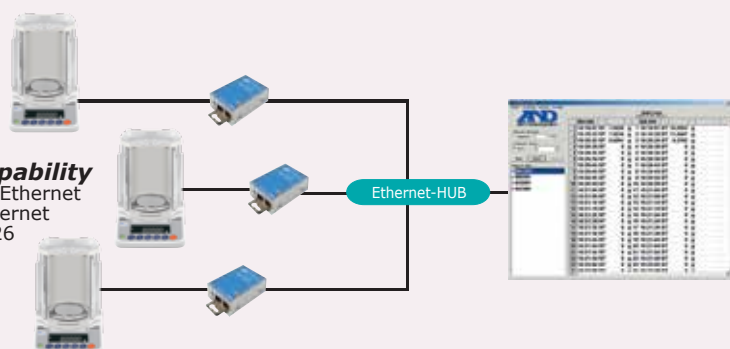

WinCT-Plus software for centralised management of a network of balances

Options



• HR-AZ Features

- Easy data capture with free software
- Strong protection against dust & water
- Shock absorber function
- Auto Power ON/OFF function
- B5 size footprint for use in narrow space
- SCF - Statistical calculation function
- Easily removable large breeze break
- Fast response time of 2 seconds
- LAN – Ethernet interface optional

• GR Features

- Easy data capture with free software
- One-Touch automatic calibration with just one push of a button
- GLP, GMP and ISO compliant
- Automatic calibration when ambient temp changes detected
- Standard RS232C interface for PCs, printers or other peripherals
- ID number for GLP output
- Auto Power Off function

Specifications	HR-250AZ	GR-200	GR-202	GR-300
Price (ex GST)	\$2,170	\$3,670	\$6,175	\$5,735
Part Number	06032800	06034100	06034200	06034300
Calibration	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	252g	210g	210g / 42g	310g
Resolution	0.1mg	0.1mg	0.1mg / 0.01mg	0.1mg
Dimensions	198(W)x294(D)x315(H)	249(W) x 330(D) x 328(H)		
Pan Size	Ø 90mm	Ø 85mm		
Power Supply	AC Adaptor TB-S139 included			

Accessories	Part Number	Price (ex GST)
Serial Cable HR-AZ DB9 Female to DB9 Female	03000007	\$55
Serial Cable GR series D25 Male to DB9 Female	03000001	\$55
HR-A OP-02 USB Interface with Cable	06054001	\$200
HR-A OP-08 Ethernet Interface & WinCT Plus	06054002	\$975
HR-A OP-09 Built in Rechargeable Battery	06054003	\$645
AD-1654 Density Determination Kit	06036350	\$1,125

GH & GX-AE Series

Analytical Semi-Micro Balances




GH-252



Options



GX-224AE
with ioniser built-in

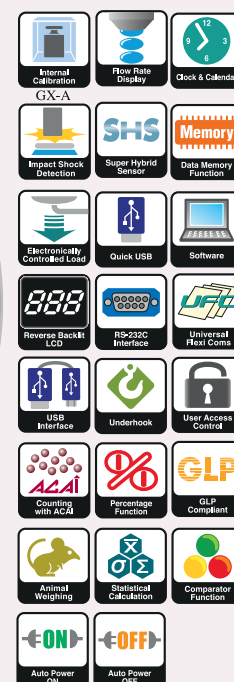

● GH-252 Features

● Easy data capture with free software

- One-Touch automatic calibration with one push of a button
- Antistatic glass
- GLP, GMP and ISO compliant
- Automatic calibration when ambient temp changes detected
- Standard RS232C
- WinCT Communications software
- Data memory function
- ID number for GLP output
- Auto Power Off function



Remote switch option for GR/GH. This switch can also be used on other balances. Please enquire.

● GX-224AE Features

● Easy data capture with free software

- Impact shock detection (ISD)
- Flow rate display (FRD) records flow rates easier
- Protection against vertical and transverse static overloading
- Fast stabilization of approx. 1 second
- One touch calibration using internal weight
- Automatic CAL when ambient temperature changes detected
- Timed calibration function
- Clearly visible, reverse backlit LCD display
- Auto Power Off function

Specifications	GH-252	GX-224AE
Price (ex GST)	\$6,885	\$5,760
Part Number	06034900	06034400
Calibration	Internal & External	Internal & External
Capacity	250g / 101g	220g
Resolution	0.1mg / 0.01mg	0.1mg
Dimensions	217(W) x 442(D) x 316(H)	259(W) x 358(D) x 332(H)
Pan Size	Ø 90mm	
Power Supply	AC Adaptor TB-S139 included	

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
GH OP-02 Quick USB interface (GH)	06034001	\$205
GH OP-08 Ethernet interface (GH)	06034002	\$1,025
AD-1653 Density Determination Kit	06036300	\$1,145
AD-1682 Rechargeable Power Supply (external)	06087210	\$800
OP-03 RS232C Host interface (GX-AE)	06053001	\$205
OP-09 Built in rechargeable battery (GX-AE)	06053002	\$655
OP-12 Animal Weigh Pan (GX-AE)	06053005	\$390
Remote switch option	LB	\$220



BM Series

Micro*, Semi-Micro & Premium Analytical Balances



Options



Neutralizing chamber

Separator plate (removable)

Weighing Chamber



BM-5 shown with AD-1676 breeze break option

To block drafts, A&D have adopted a double-ring structure around the weighing pan and two vertical shields under the separation plate. This offers more space and easier operation. The removable separator plate enables the user to have one large chamber if needed.

***Microgram BM models are only available via qualified & trained A&D BM Micro Partners**

In built fanless ionizer



AD-1676 Breeze Break



AD-1671 Anti-vibration Table



AD-1672A Breeze Break

AD-1672 Breeze Break

● New BM-5 Model includes AD-1676 breeze break as standard

- Simple data capture with free WINCT software
- Large weighing chamber for improved usability
- Built-in temperature, humidity, and atmospheric pressure sensors
- Interlockable slide doors allowing efficient operation with both hands
- Sensitivity drift (10 °C to 30 °C, when self calibration is not used) ± 2 ppm / °C
- Easy, fanless elimination of static electricity using a built-in ionizer & antistatic breeze break
- Calibration: Automatically triggered based on temperature variation or by operator
- Can store up to 200 sets of weighing data (100 sets with date & time)
- AD-1688 as standard accessory: dedicated USB key to record weighing data as well as environmental parameters into MS Excel readable files
- 12 weighing units : g, mg, oz, ozt, ct, mom, dwt, GN, tael, tola, pcs (counting), %.
- Optional pipette accuracy testing kit
- Output interfaces: RS-232C (standard), Quick USB (standard), Ethernet (optional)

OPTIONS: Recommended to optimise your BM measurement performance.

Specifications	BM-5	BM-20	BM-22	BM-252	BM-200	BM-300	BM-500
Price (ex GST)	\$16,900	\$19,565	\$18,535	\$11,280	\$9,220	\$9,635	\$10,295
Part Number	06035900	06035000	06035400	06035300	06035500	06035600	06035700
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	5.2g	22g	5.1g / 22g	250g	220g	320g	520g
Resolution	0.001mg	0.001mg	0.001mg / 0.01mg	0.01mg	0.1mg	0.1mg	0.1mg
Dimensions	259 (W) x 466 (D) x 326 (H) mm					259 (W) x 466 (D) x 326 (H) mm	
Pan Size	Ø 25mm (50 and 95mm for filter pans)			Ø 90mm	Ø 90mm	Ø 90mm	Ø 90mm
Power Supply	AC Adaptor TB-S139 included						

● ex Japan

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
OP-08 Ethernet interface with WinCT-Plus software	06035002	\$1,260
OP-14 Pipette accuracy testing kit	06035001	\$2,930
AD-1671 Anti-vibration table	06035200	\$2,175
AD-1672 Table-top breeze break	06035100	\$2,285
AD-1672A Table-top breeze break (with inclined front beam panel)	06035800	\$2,585
AD-1676 Breeze Break (supplied standard with BM-5)	06035910	\$1,795
AD-1653 Density determination kit	06036300	\$1,145


FX-i / FX-iWP Series

Precision Balances



**"There are TWO types of Lab staff...
Those who HAVE SPILLED STUFF
on their laboratory balance,
and those that will!"**

- Free data capture software
- IP65 Water / Dust Proof (WP)
- Shock absorber function
- Auto Power ON/OFF function
- B5 size footprint for use in narrow space
- VFD Display for easy to read weighing results
- SCF - Statistical calculation function
- Standard RS-232C
- Fast compact SHS Sensor, response time only 1 second
- Quick USB or LAN interface (optional)
- Breeze breaks are only included with small capacity balances

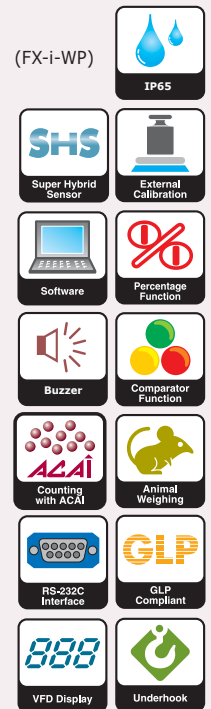

Options



Specifications	FX-300i●	FX-500i●	FX-3000i	FX-5000i	FX-300iWP●	FX-3000iWP
Price (ex GST)	\$1,110	\$1,280	\$1,390	\$1,445	\$1,905	\$1,910
Part Number	06054020	06054120	06054050	06054150	06055020	06055050
Calibration	External	External	External	External	External	External
Capacity	320g	520g	3200g	5200g	320g	3200g
Resolution	0.001g	0.001g	0.01g	0.01g	0.001g	0.01g
Dimensions	193(W) x 263(D) x 86(H) mm					
Pan Size	Ø 130mm		Ø 150mm		Ø 130mm	Ø 150mm
Power Supply	AC Adaptor TB-S139 (included)					

● These balances have breeze breaks included

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female (not waterproof)	03000007	\$55
Optional Square Pan fits 3000 models only 180mm x 180mm (approved by NMI)	06054009-E	\$200
FX-i OP-02 USB Interface with cable	06054001	\$200
FX-i OP-08 Ethernet Interface with WinCT Plus	06054002	\$975
FX-i OP-09 Built in Rechargeable Battery	06054003	\$645
FX-i OP-10 Standard Small Breeze Break (Ext. dimensions 184(W) x 184(D) x 85(H) mm)	06054004	\$205
FX-i OP-11 Large Breeze Break (External dimensions 193(W) x 193(D) x 199.5(H) mm)	06054005	\$300
FX-i-WP Standard Small Breeze Break (Ext. dimensions 184(W) x 184(D) x 85(H) mm)	06054007	\$205
FX-i-WP Large Breeze Break (External dimensions 193(W) x 193(D) x 199.5(H) mm)	06054008	\$300
FX-i Plastic Protection Cover (box of 5)	AX-FXI-31	\$90
AD-1654 Density Determination Kit	06036350	\$1,125



FZi / FZiWP Series

Precision Balances



Trade Approval
NMI #6/4C/269



(FZ-i-WP)




FZ model with standard
small breeze break



Firmly Sealed Pan Support
with protective membrane
(-WP IP65 models)



Large Breeze Break
(option)



Square pan
(option for 3000g models)

Options



Free data capture software

- IP65 Water / Dust Proof (WP)
- Built-in internal calibration at the touch of a button
- Auto Power ON/OFF function
- B5 size footprint for use in narrow space
- VFD Display for easy to read weighing results
- SCF - Statistical calculation function
- Standard RS-232C
- Fast compact SHS Sensor, response time only 1 second
- Quick USB or LAN interface (optional)
- Custom teflon coating available, enquire with A&D

Specifications	FZ-300i •	FZ-500i•	FZ-3000i•	FZ-5000i•	FZ-300iWP•	FZ-3000iWP•
Price (ex GST)	\$1,340	\$1,500	\$1,730	\$1,840	\$2,240	\$2,240
Part Number	06056010	06056110	06056020	06056120	06056030	06056040
Price with NMI kit	\$1,450	N/A	\$1,840	N/A	\$2,350	\$2,350
Part Number	06056010-TA	N/A	06056020-TA	N/A	06056030-TA	06056040-TA
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	320g	520g	3200g	5200g	320g	3200g
Resolution	0.001g	0.001g	0.01g	0.01g	0.001g	0.01g
NMI Resolution	0.01g	N/A	0.1g	N/A	0.01g	0.1g
Dimensions	193(W) x 263(D) x 86(H) mm					
Pan Size	Ø 130mm		Ø 150mm		Ø 130mm	Ø 150mm
Power Supply	AC Adaptor TB-S139 (included)					

• These balances have breeze breaks included

NMI Versions also require trade verification - fees apply

Accessories

	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female (not waterproof)	03000007	\$55
Optional Square Pan fits 3000 models only (approved by NMI) 180mm x 180mm	06054009-E	\$200
FZ-i OP-02 USB Interface with cable	06054001	\$200
FZ-i OP-08 Ethernet Interface with WinCT Plus	06054002	\$975
FZ-i OP-09 Built in Rechargeable Battery	06054003	\$645
FZ-i OP-10 Standard Small Breeze Break (Ext. dimensions 184(W) x 184(D) x 85(H) mm)	06054004	\$205
FZ-i OP-11 Large Breeze Break (External dimensions 193(W) x 193(D) x 199.5(H) mm)	06054005	\$300
FZ-i-WP Standard Small Breeze Break (Ext. dimensions 184(W) x 184(D) x 85(H) mm)	06054007	\$205
FZ-i-WP Large Breeze Break (External dimensions 193(W) x 193(D) x 199.5(H) mm)	06054008	\$300
FZ-i Plastic protection cover (box of 5)	AX-FXI-31	\$90
AD-1654 Density Determination Kit	06036350	\$1,125

GX Series Precision Balances



Trade Approval
NMI #6/4C/219



GX-400
(with optional Glass Breeze Break)



GX-600
(with Standard Breeze Break)



GX-6100

● Easy data capture with free WinCT software

- Fast - response time just ONE second!
- Automatic internal calibration: simply push one button
- Percentage Counting and Comparator function
- ACAI Automatic counting accuracy improvement
- Data memory function
- GLP, GMP and ISO compliance



Quick reference card

Specifications	GX-200 	GX-400	GX-600	GX-2000 	GX-4000	GX-6100	GX-8000
Price with NMI kit	\$2,350	\$2,650	\$3,250	\$2,350	\$2,650	\$3,450	\$2,120
Part Number	06052007-TA	06052006-TA	06052005-TA	06052004-TA	06052000-TA	06052002-TA	06052001-TA
Calibration	Internal calibration with internal mass						
Capacity	210g	410g	610g	2100g	4100g	6100g	8100g
Resolution	0.001g	0.001g	0.001g	0.01g	0.01g	0.01g	0.1g
NMI Resolution	0.01g	0.01g	0.01g	0.1g	0.1g	0.1g	1g
Dimensions	210 (W) x 317(D) x 86(H) mm						
Pan Size	128mm x 128mm			165mm x 165mm			
Power Supply	AC Adaptor TB-S139 (included)						

NMI Versions also require trade verification - fees apply
 ex Japan

Accessories	Part Number	Price (ex GST)
Serial Cable DB25 Male to DB9 Female	03000001	\$55
GFX OP-04 Comparator output and buzzer	06052504	\$510
GFX OP-06 Analog/current loop output	06052505	\$1,625
GX OP-10 Glass breeze break (to suit pan size 128mm x 128mm)	06052503	\$620
GX OP-11 Glass breeze break (to suit pan size 165mm x 165mm)	06052502	\$620
GX OP-12 Animal weighing pan	06052501	\$390
GX OP-13 Density determination kit	06052500	\$1,060
GX Plastic Cover (pack of 5; to suit pan size 128mm x 128mm)	AX-073003691-S	\$110
GX Plastic Cover (pack of 5; to suit pan size 165mm x 165mm)	AX-073003692-S	\$110











GX-A / GF-A Series

Multi-Functional Precision Balances



Trade Approval
NMI #6/4C/



Options



GX-1003A
(with Standard Breeze Break)



GF-3002A

- Impact shock detection (ISD)*1 allows users to take preventive measures as necessary
- Flow rate display (FRD) that makes recording flow rates easier and more accurate
- Protection against vertical and transverse static overloading
- Flow rate comparator that indicates whether the flow rate is within the designated limits
- Tare memory function that saves the tare value in non-volatile memory
- Fast stabilization of approx. 1 second
- One touch calibration using internal weight (GX-A)
- Automatic self calibration to maintain accuracy under temperature changes (GX-A)
- Timed calibration function (GX-A)
- Clearly visible, reverse backlit LCD display
- Multiple weighing units: g, oz, lb, lb-oz, ozt, ct, mom, dwt, grain
- Clock and calendar function
- GLP/GMP/GCP/ISO compliant output to meet documentation requirements
- Universal Flexi Coms (UFC) function to edit serial data output/printout format
- Auto power ON and OFF functions
- **Trade Approval is pending in 2021 - Contact A&D 1800 241 434**

Specifications	GX-203A	GX-403A	GX-603A	GX-1003A	GX-1603A	GX-2002A	GX-4002A	GX-6002A	GX-6001A	GX-10001A
Price (ex GST)	\$2,150	\$2,450	\$3,050	\$3,865	\$4,105	\$2,150	\$2,450	\$3,350	\$1,800	\$2,005
Part Number	06053160	06053300	06053170	06053180	06053310	06053400	06053500	06053600	06053190	06053210
Calibration	Internal calibration with internal mass									
Capacity	220g	420g	620g	1100g	1000g/1620g	2200g	4200g	6200g	6200g	10200g
Resolution	0.001g	0.001g	0.001g	0.001g	0.001g/0.002g	0.01g	0.01g	0.01g	0.1g	0.1g
Dimensions	212 (W) x 317(D) x 93(H) mm									
Pan Size	128mm x 128mm					165mm x 165mm				
Power Supply	AC Adaptor TB-S139 (included)									
● ex Japan										
● These balances have breeze breaks included										

● These balances have breeze breaks included

Specifications	GF-203A●	GF-403A●	GF-603A●	GF-1003A●	GF-1603A	GF-2002A	GF-4002A	GF-6002A	GF-6001A	GF-10001A
Price (ex GST)	\$1,845	\$2,055	\$2,525	\$3,620	\$3,865	\$1,850	\$2,055	\$3,085	\$1,605	\$1,805
Part Number	06053220	06053230	06053800	06053240	06053320	06053250	06053260	06053150	06053270	06053280
Calibration	External manual calibration									
Capacity	220g	420g	620g	1100g	1000g/1620g	2200g	4200g	6200g	6200g	10200g
Resolution	0.001g	0.001g	0.001g	0.001g	0.001g/0.002g	0.01g	0.01g	0.01g	0.1g	0.1g
Dimensions	212 (W) x 317(D) x 93(H) mm									
Pan Size	128mm x 128mm					165mm x 165mm				
Power Supply	AC Adaptor TB-S139 (included)									
● ex Japan								● These balances have breeze breaks included		

● These balances have breeze breaks included

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
OP-03 RS232C Host Interface	06053001	\$205
OP-04 Comparator relay output	06053006	\$510
OP-09 Built In Rechargeable Battery	06053002	\$655
OP-10 Large Glass Breeze Break	06053003	\$620
Protective Covers (pack of 5)	06053004	\$120
OP-12 Animal weigh pan	06053005	\$390

GX-K / GF-K Series

Industrial Precision Balances



Rugged Construction




Trade Approval
NMI #6/4C/219
(GX-K)



(GX-K)



(GF-K)



• Free data capture software

- IP65 – Water and dust proof
- Fast response time with Super Hybrid Sensor (SHS) – only 1.5 seconds
- One touch Automatic calibration with motor-driven internal calibration mass (GX-K)
- Standard RS-232C Interface
- GLP, GMP and ISO compliant
- Automatic self calibration when the ambient temperature changes (GX-K)
- Underhook weighing (for thermal /magnetic samples, or density measurement)
- Display auto power off function

Specifications	GX-8K	GX-8K2	GX-10K	GX-20K	GX-30K	GF-8K	GF-10K	GF-12K	GF-30K
Price (ex GST)	\$4,590	\$3,500	\$4,785	\$4,560	\$5,385	\$4,355	\$4,685	\$4,210	\$5,045
Part Number	06062100	06062900	06062800	06062500	06062700	06062000	06062300	06062200	06062600
Price with NMI kit	\$4,705	N/A	\$4,900	\$4,675	\$5,500	N/A	N/A	N/A	N/A
Part Number	06062100-TA	N/A	06062800-TA	06062500-TA	06062700-TA	N/A	N/A	N/A	N/A
Calibration	Internal	Internal	Internal	Internal	Internal	External	External	External	External
Capacity	8.1kg	8.1kg / 2.1kg	10.1kg	21kg	31kg	8.1kg	10.1kg	12kg	31kg
Resolution	0.01g	0.1g / 0.01g	0.01g	0.1g	0.1g	0.01g	0.01g	0.1g	0.1g
NMI Resolution	0.1g	N/A	0.1g	1g	1g	N/A	N/A	N/A	N/A
Dimensions	300(W) x 355(D) x 111(H) mm								
Pan Size	270mm x 210mm								
Power Supply	AC Adaptor TB-S139 (included)								

NMI Versions also require trade verification - fees apply

ex Japan

Accessories	Part Number	Price (ex GST)
Serial Cable DB25 Male to DB9 Female	03000001	\$55
GFX/K OP-04 Comparator output and buzzer	06052504	\$510
GFX/K OP-06 Analog/current loop output	06052505	\$1,625
Protective Cover for GX/F-K (pack of 5)	AX-073007197-S	\$110



GP Series

Industrial Precision Balances



Trade Approval
NMI #6/4C/220




Option



• Easy data capture with free WINCT software

- Australia's #1 Geo-test balance!
- Swing arm design or separate display design
 - IP65 protected
 - Easy calibration with internal calibration mass
 - SHS response speed of only 1.5 seconds
 - GLP, GMP and ISO compliant
 - Large Vacuum Fluorescent Display
 - Data memory function
 - Counting function with ACAI (Automatic Counting Accuracy Improvement)
 - Smart range (GP-32K/102K)
 - Comparator function
- Underhook weighing for thermal and magnetic samples as well as for density calculation

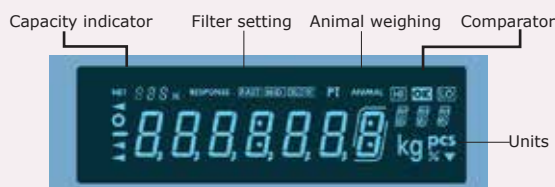

Remote switch option for GP Balance. This switch can also be used on a number of other balances. Please enquire.

Specifications	GP-12K	GP-20K	GP-32K	GP-32KS 🇯🇵	GP-30K	GP-30KS 🇯🇵
Price (ex GST)	\$4,930	\$5,620	\$5,145	\$5,505	\$6,175	\$6,175
Part Number	06072001	06072002	06072008	06072011	06072004	06072010
Price with NMI kit	\$5,045	\$5,735	\$5,260	\$5,615	\$6,290	\$6,290
Part Number	06072001-TA	06072002-TA	06072008-TA	06072011-TA	06072004-TA	06072010-TA
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	12kg	21kg	6kg/31kg	6kg/31kg	31kg	31kg
Resolution	0.1g	0.1g	0.1/1g	0.1/1g	0.1g	0.1g
NMI Resolution	1g	1g	1g	1g	1g	1g
Dimensions	372(W) x 615(D) x 130(H) mm					
Pan Size	384mm x 344mm				386mm x 346mm	
Power Supply	AC Adaptor TB-301 (included)					

NMI Versions also require trade verification - fees apply

• ex Japan

Specifications	GP-60K	GP-60KS🇯🇵	GP-61K	GP-61KS🇯🇵	GP-100K🇯🇵	GP-102K🇯🇵
Price (ex GST)	\$6,765	\$6,765	\$8,025	\$8,235	\$10,270	\$9,125
Part Number	06072014	06072012	06072009	06072013	06072006	06072007
Price with NMI kit	N/A	\$6,880	N/A	N/A	\$10,385	\$9,240
Part Number	N/A	06072012-TA	N/A	N/A	06072006-TA	06072007-TA
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	61kg	61kg	61kg	61kg	101kg	61kg/101kg
Resolution	1g	1g	0.1g	0.1g	1g	1g / 10g
NMI Resolution	N/A	10g	N/A	N/A	10g	10g / 100g
Dimensions	373(W) x 615(D) x 130(H) mm					
Pan Size	384mm x 344mm		386mm x 346mm			
Power Supply	AC Adaptor TB-301 (included)					

NMI Versions also require trade verification - fees apply

• ex Japan

Accessories	Part Number	Price (ex GST)
Serial Cable DB25 Male to DB9 Female	03000001	\$55
GP OP-04 Comparator Output/RS232C	06072104	\$505
GP OP-06 Analog / Current Loop Output •	06052505	\$1,625
GP OP-20 Underhook (for GP12K/20K/32K/30K/40K)	06072120	\$425
GP OP-21 Underhook (for GP60K/100K/100KS/102K)	06072121	\$425
Remote switch option	LB	\$220
Plastic Cover for GP Display (Pack of 5)	10-73004753	\$110

• ex Japan

HT Series

Precision Compact Balances



HT-120 model

HT Compact scale



HT models have their own storage box.



Stainless Steel Pan Option

- HT-120 has hygienic and chemically resistant stainless steel (SUS304) weighing pan and protector plate
- HT-120 has resolution of 0.01 g with excellent repeatability of 0.01 g (σ)
- Large LCD display (15 mm character height) with clear white backlight
- Three colour bars to sort / colour code scales easily (except HT-120)
- Stackable carrying case for easy storage
- Security slot in the rear of the scale to accommodate an anti-theft lock
- HT-120 units: g, oz, ct, mom, ozt, grain, tola, tael, and Newton
- HT units: g, oz, ozt, tola, tael
- Auto-power off function to avoid wasting battery power
- Power supplied from 4 AA batteries
- Battery indicator that tells you the remaining battery level
- Tare function that offsets the weight of a container with just one key press
- Optional AC adapter available



Stackable carry cases


Specifications	HT-120	HT-300	HT-500	HT-3000	HT-5000
Price (ex GST)	\$190	\$115	\$145	\$115	\$145
Part Number	06315000	06311000	06312000	06313000	06314000
Calibration	External	External	External	External	External
Capacity	120g	310g	510g	3100g	5100g
Resolution	0.01g	0.1g	0.1g	1g	1g
Dimensions	160(W) x 175(D) x 70(H) 195(W) x 136(D) x 44(H) mm				
Pan Size	Ø 70mm	132mm x 130mm			
Power Supply	AC Adaptor TB-S200A (not included) or 4 x AA batteries (included)				

Accessories	Part Number	Price (ex GST)
Stainless Steel Pan Option for standard HT Series	06311010	\$50
Optional AC Adaptor	ECTB-S200A	\$65
Carry Case (replacement)	06310103	\$25




HT-CL Series


Compact Packing Scales



Quantity too small



Quantity just right



Quantity too large



- Highly-visible, multi-coloured LED lights for quick and unmistakable comparator judgements
- Operation with either four AA batteries or the provided AC adapter
- Large LCD display with 13.5-mm high characters
- Auto power off function to avoid wasting power
- Multiple weighing units: g, oz, ozt, lb-oz
- Security slot in the rear of the scale to accommodate an anti-theft lock
- Key lock function to prevent operators from making changes to the scale settings
- Comes in a stackable carrying case as standard to save space when stored
- Includes three colour bars (red, green and orange)



**Ideal for
RAPID
Punnet weighing!**



Carry Case
(steel pan is optional)

Specifications	HT-500CL	HT-3000CL	HT-5000CL
Price (ex GST)	\$300	\$300	\$300
Part Number	06318000	06317000	06319000
Calibration	External	External	External
Capacity	510g	3100g	5100g
Resolution	0.1g	1g	1g
Dimensions	195(W) x 136(D) x 47(H) mm		
Pan Size	132mm x 130mm		
Power Supply	AC Adaptor TB-S200A (included) or 4 x AA batteries (not included)		

Accessories	Part Number	Price (ex GST)
Stainless Steel Pan Option for standard HT Series	06311010	\$50
AC Adaptor	ECTB-S200A	\$65
Carry Case (replacement)	06310103	\$25

EJ Series

Compact Scales



EJ breeze break



EJ-1500 model



EJ scales are stackable

- Counting, % weighing, comparator
- Calculates density automatically (option EJ-13)
- Hygienic and rustproof stainless steel pan
- Supports multiple weighing units
- Stackable body to save storage space
- Easy PC connection with optional RS232 cable
- EJ-27 and EJ-03 options cannot be used at the same time

 NEW! OP-27: Wireless Bluetooth interface module available



Options



Specifications	EJ-210	EJ-410	EJ-610	EJ-1500	EJ-4100	EJ-6100
Price (ex GST)	\$500	\$665	\$785	\$500	\$670	\$785
Part Number	06044010	06044030	06044040	06044050	06044080	06044090
Calibration	External	External	External	External	External	External
Capacity	210g	410g	610g	1500g	4100g	6100g
Resolution	0.01g	0.01g	0.01g	0.1g	0.1g	0.1g
Dimensions	190(W) x 208(D) x 59(H) mm					
Pan Size	Ø110mm			127mm x 140mm		
Power Supply	4 x AA size batteries (not included) or AC Adaptor TB-S200A (included)					

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
EJ OP-02 USB Interface (USB-A to USB-B connection cable not included)	06044001	\$160
EJ OP-03 RS-232C Interface	06044002	\$115
EJ OP-07 Underhook for EJ-4100/6100	06044003	\$90
EJ OP-08 Underhook for EJ-1500/2000	06044004	\$90
EJ OP-11 Tilting Breeze Break	06044005	\$120
EJ OP-12 Carry Case for EJ Series	06044006	\$165
EJ OP-27 Wireless Bluetooth interface module*	06044008	\$180

* EJ-27 and EJ-03 cannot be used at the same time and to be paired with either the AD-8541-PC or AD-8931




EW-i Series

Value Compact Balances



Trade Approval
NMI #6/4C/230



EW-1500i Balance

• Free WINCT software available

- Advanced, triple range balances
- Capacities to 12kg
- Large back lit LCD display with wide viewing angle
- Standard RS232C data interface
- Overload protected to take hard use
- 9 built in weighing units plus counting and percentage software
- Standard comparator function with LO/GO/HI indication
- Full digital calibration with user definable calibration mass
- Conforms with GLP standards
- Stainless steel weighing pan
- Optional rechargeable battery pack
- Optional under hook weighing for 12kg model

Options



Weighing Range

(EW-i series only)
Triple range indication

ACAI

Automatic Counting
Accuracy Improvement

HI/OK/LO


Comparator Result

Sample

Register a sample count or
100% in percentage

Print

Transmit data to printer
or computer

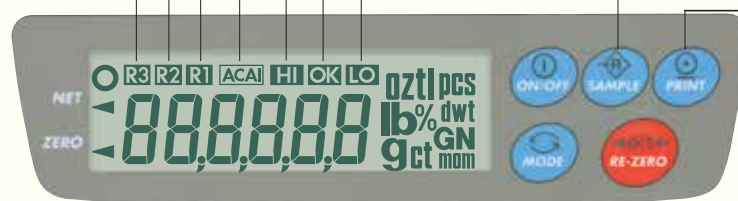

Multi weighing units

oz	— Ounce (av)	g	— Gram
ozt	— Troy Ounce	ct	— Carat
tl	— Tael	mom	— Momme
lb	— Livre (av)	pcs	— Pieces
GN	— Grain unit	%	— Percent
dwt	— Pennyweight		

Specifications	EW-150i			EW-1500i			EW-12Ki		
Price (ex GST)	\$560			\$560			\$560		
Part Number	06043700			06043800			06043900		
Capacity	30g	60g	150g	300g	600g	1500g	3000g	6000g	12Kg
Resolution	0.01g	0.02g	0.05g	0.1g	0.2g	0.5g	1g	2g	5g
Price with NMI kit	\$670			\$670			\$670		
Part Number	06043700-TA			06043800-TA			06043900-TA		
Capacity	60g		150g	300g	600g	1500g	3000g	6000g	12Kg
Resolution	0.02g		0.05g	0.1g	0.2g	0.5g	1g	2g	5g
Dimensions	190(W) x 218(D) x 55(H) mm			190(W) x 218(D) x 53(H) mm					
Pan Size	Ø 110mm			133 mm x 170 mm					
Power Supply	AC Adapter TB-S200A (included) or rechargeable battery pack (not included)								

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
EKWi OP-04 Comp/Relay Output	06043001	\$320
EKWi OP-07 Underhook for 6000g/12kg models only	06041004	\$80
EKWi OP-09 Rechargeable battery pack Ni-MH (Approx. 9 hrs)	06043003	\$320
Protective Cover for EKWi (pack of 5)	AX-3005824-5S	\$80

EK-i Series

Industrial Compact Balances



Trade Approved & Great Value!

- Free downloadable WinCT software available

- NMI Models (EK-410i, EK-610i, EK-4100i, EK-6100i)
- Standard RS-232C interface
- Large LCD display with backlight
- GLP compliance
- Overload protection
- Standard comparator function
- Optional rechargeable battery pack




EK Battery Pack Option



EK-i Balance

- 9 Weighing units plus count and percentage mode
- Counting function with automatic counting accuracy improvement (ACAI)



Options



Specifications	EK-410i	EK-610i	EK-3000i	EK-4100i	EK-6100i	EK-6000i	EK-12Ki
Price (ex GST)	\$830	\$1,005	\$785	\$830	\$1,005	\$830	\$1,005
Part Number	06042101	06042201	06043400	06042301	06042401	06043500	06043600
Capacity	400g	600g	3000g	4000g	6000g	6000g	12kg
Resolution	0.01g	0.01g	0.1g	0.1g	0.1g	1g	1g
Price with NMI kit	\$940	\$1,120	N/A	\$940	\$1,120	N/A	N/A
Part Number	06042101-TA	06042201-TA	N/A	06042301-TA	06042401-TA	N/A	N/A
Capacity	400g	600g	N/A	4000g	6000g	N/A	N/A
Resolution	0.1g	0.1g	N/A	1g	1g	N/A	N/A
Calibration	External	External	External	External	External	External	External
Dimensions	190(W) x 218(D) x 55(H)						
Pan Size	Ø 110mm		133mm x 170mm				
Power Supply	AC Adaptor TB-S200A (included) or rechargeble battery pack (not included)						


NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
EKWi OP-04 Comp/Relay Output	06043001	\$320
EKWi OP-07 Underhook for 6000g/12kg models only	06041004	\$80
EKWi OP-09 Rechargeable battery pack Ni-MH (Approx. 9 hrs)	06043003	\$320
Protective Cover for EKWi (pack of 5)	AX-3005824-5S	\$80



EK-L Series

Compact Industrial Precision Scales



Options



Bright LCD Screen
22mm Character height



- Stainless steel SUS430 weighing pan cover
- Multiple weighing units: g, kg, oz, lb, ozt
- Percentage Counting and Comparator function
- Easy-to-read LCD display with clear, white backlight
- Counting mode with Automatic Counting Accuracy Improvement (ACAI) function
- RS-232C interface as standard
- Display hold function
- GLP, GMP and ISO compliance
- Battery life indicator

Specifications	EK-15KL	EK-30KL	
Price (ex GST)	\$1,005	\$1,005	
Part Number	06045100	06045200	
Calibration	External	External	
Capacity	15kg	3kg	30kg
Resolution	0.1g	0.1g	1g
Dimensions	315(W) x 339 (D) x 130(H) mm		
Pan Size	300mm x 210 mm		
Power Supply	AC Adaptor TB-S200A (included) or rechargeable battery (not included)		


Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
Rechargeable Battery option (Approx. 100hrs with backlight off)	ECEB-6V	\$20

SJ-HS Series

Compact Bench Scales



Trade Approval
NMI #6/4C/278



- Stainless steel weighing pan
- High speed weighing in less than 1 second
- Multiple weighing units – g, lb, oz and lb-oz
- Level bubble and adjustable feet for precise levelling
- AC adapter or Battery (powers up to 2000 hours)
- Removable stainless steel weighing platform and molded plastic construction are easy-to-clean

NON TRADE MODELS

Specifications	SJ-1000HS	SJ-2000HS	SJ-5000HS	SJ-12KHS	SJ-5001HS	SJ-20KHS	SJ-30KHS
Price (ex GST)	\$280	\$280	\$280	\$280	\$305	\$305	\$305
Part Number	06303040	06304050	06304060	06304070	06304080	06305000	06305010
Calibration	External	External	External	External	External	External	External
Capacity	1000g	2000g	5000g	12kg	5000g	20kg	30kg
Resolution	0.5g	1g	2g	5g	1g	10g	20g
Dimensions	265(W) x 250(D) x 106(H) mm						
Pan Size	230mm x 190mm						
Power Supply	AC Adaptor TB-S200A (included) or 4 x D size batteries (not included)						

TRADE APPROVED MODELS

Specifications	SJ-1000N	SJ-2000N	SJ-5000N	SJ-12KN
Price with NMI kit	\$305	\$305	\$305	\$305
Part Number	06303000	06303010	06303020	06303030
Calibration	External	External	External	External
Capacity	1000g	2000g	5000g	10kg / 12kg
Resolution	1g	2g	5g	10g / 20g
Dimensions	265(W) x 250(D) x 106(H) mm			
Pan Size	230mm x 190mm			
Power Supply	AC Adaptor TB-S200A (included) or 4 x D size batteries (not included)			



4 x D size batteries

NMI Versions also require trade verification - fees apply



SJ-WP MK2 / SJ-WP-BT Series

Waterproof Packing Scales



Trade Approval
NMI #6/4C/312



SJ-WP improves packing efficiency compared to standard scales

- NEW! Bluetooth models available
- 5000hrs of continuous operation on 6D cell batteries
- Fast stabilisation (just 0.5 seconds!)
- 10 comparator setting IDs
- Tactile keys and stainless weighing pan
- Submersible IP67 protection
- Large & Clear LCD Display (26mm)
- Multiple selectable weighing units: g, lb, oz, ozt, tael etc.
- Bright and multicoloured LED comparator lamps
- Trade Approved models come with trade approved stickers

SJ-WP-BT series
shown with Bluetooth options



AD-8541-PC



AD-8931



Packing scale frame kit (option)

MK2 Models	SJ-3000WP MK2	SJ-6000WP MK2	SJ-15KWP MK2	SJ-30KWP MK2
Price (ex. GST)	\$500	\$500	\$500	\$500
Part Number (MK2)	06305700	06305800	06305900	06306000
Bluetooth Models	SJ-3000AWP-BT	SJ-6000AWP-BT	SJ-15KAWP-BT	SJ-30KAWP-BT
Price (ex. GST)	\$605	\$605	\$605	\$605
Part Number (BT)	06306100	06306200	06306300	06306400
Capacity	3000g	6000g	15kg	30kg
Resolution	standard 0.5g high 0.1g	standard 1g high 0.2g	standard 2g high 0.5g	standard 5g high 1g
NMI Resolution	1.5kg / 3kg 0.5g / 1g	3kg / 6kg 1g / 2g	6kg / 15kg 2g / 5g	15kg / 30kg 5g / 10g
Dimensions	236(W) x 260(D) x 148(H) mm			
Pan Size	232mm x 192mm			
Power Supply	6 x D size batteries			

NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Replacement stainless steel feet (set of 4)	1074018232-SFS	\$38
Packing scale frame kit	06305610	\$155
AD-8541-PC Bluetooth convertor for PC	09024030	\$185
AD-8931 Wireless remote display (26mm digits)	06086710	\$185

SK-WP Series

Stainless Steel Bench Scales



Trade Approval
NMI #6/4C/216



● NMI Trade Approved except for SK-5001WP

- Trade Approved models supplied as standard
- Dust and water proof (IP65)
- Stainless steel body and Weighing Pan
- Large & Clear LCD Display (25mm)
- 1/2000 Resolution (SK-5001WP: 1/5000)
- Net Weight / Stability Indication
- Portable (6 x D Type Batteries not included)
- Long battery life: Approx. 1200 hrs with alkaline cells at 20°C

Specifications	SK-1000WP	SK-2000WP	SK-5000WP	SK-5001WP	SK-10KWP	SK-20KWP
Price (ex GST)	\$605	\$605	\$605	\$605	\$605	\$605
Part Number	06400100	06400200	06400300	06400600	06400400	06400500
Capacity	1000g	2000g	5000g	5000g	10000g	20000g
Resolution	0.5g	1g	2g	1g	5g	10g
Dimensions	266(W) x 280(D) x 156(H) mm					
Pan Size	232mm x 192mm					
Power Supply	AC Adaptor TB-S200A (included) or 6 x D size batteries (not included)					

*NMI Versions also require trade verification - fees apply

HL-WP Series

Professional Catering Scales



- Body made of stainless steel and protected to IP-65
- Only HL-3000LWP comes with larger flat pan
- Clear Liquid Crystal Display (LCD)



Specifications	HL-300WP	HL-1000WP	HL-3000WP	HL-3000LWP
Price (ex GST)	\$480	\$480	\$480	\$500
Part Number	06410100	06410200	06410300	06410400
Capacity	300g	1000g	3000g	3000g
Resolution	0.1g	0.5g	1g	1g
Dimensions	170(W) x 220(D) x 63(H) mm			174(W) x 220(D) x 63(H) mm
Pan Size	128mm x 128mm			174 x 137mm
Power Supply	6 x AA size batteries (included) or AC Adaptor TB-S200A (not included)			

IP65 Water & Dust Protection!



Hazardous area weighing doesn't have to end in tears.

Safety Matters.

Intrinsically Safe IECEx / ATEX Scales.

Certificate No: IECEx FMG 15.0006X

Certificate No: IECEx FMG 17.0018X

Full Certificate Details at:

www.andweighing.com.au/latest-news/iecex



*HV-CEP Indicators
are NOT sold seperately.*

EK-EP Series

Intrinsically Safe Compact Balances




Certificate No.

IECEx FMG 15.0006X

Full Certificate Details at:

www.andweighing.com.au/latest-news/iecex

- IECEx compliant, ideal for hazardous area weighing.
- Easy to read LCD display with backlight (16mm character height)
- Chemically resistant stainless steel SUS430 weighing pan.
- Comparator function for faster filling, packing, sorting
- ACAI Automatic counting accuracy improvement

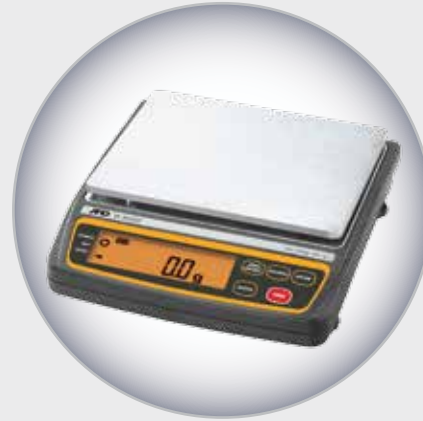

Specifications	EK-300EP	EK-3000EP	EK-12KEP
Price (ex GST)	\$1,575	\$1,575	\$1,575
Part Number	06046100	06046200	06046300
Capacity	300g	3000g	12kg
Resolution	0.01g	0.1g	1g
Dimensions	190(W) x 218(D) x 54(H) mm	190(W) x 218(D) x 53(H) mm	
Pan Size	Ø 110mm	133 mm x 170 mm	
Power Supply	4 x AA batteries* (Approx. 250hrs)		

*DURACELL AA alkaline MN1500 LR6, ENERGIZER AA E91 alkaline LR6 AM3, PANASONIC AA alkaline LR6 (XJ) 1.5V batteries

Accessories	Part Number	Price (ex GST)
Carry Case	06044006	\$165
Protective cover (pack of 5)	AX-3005824-5S	\$80

HV-CEP Series

Explosion Proof Platform Scales



Certificate No.
IECEx FMG 17.0018X

Full Certificate Details at:
www.andweighing.com.au/latest-news/iecex



- Auto-tare and negative comparison function
- Counting mode and accumulation function
- Highly-visible, LCD display with white backlight
- Bright and multi-coloured 5-step LED comparator lights



- IECEx / ATEX internationally certified scales
- Easy settings using the alphanumeric keypad


Specifications	HV-15KCEP	HV-60KCEP	HV-200KCEP
Price (ex GST)	\$2,975	\$3,320	\$3,890
Part Number	03052500	03052501	03052502
Capacity	3 / 6 / 15kg	15 / 30 / 60kg	60 / 150 / 220kg
Resolution	0.001 / 0.002 / 0.005kg	0.005 / 0.01 / 0.02kg	0.02 / 0.05 / 0.1kg
Dimensions	250(W) x 397(D) x 439(H) mm	330(W) x 585(D) x 776(H) mm	390(W) x 691(D) x 776(H) mm
Pan Size	250 x 250 mm	330 x 424 mm	390 x 530 mm
Power Supply	4 x D size batteries* 1.5 V		

*Up to 1500 hours with LED and backlight off; Up to 1000 hours with LED and backlight on



EM Series

Value Parcel Scales



Optional desk bracket and
Optional Tilting Indicator Bracket
for a wider viewing angle!

**BEST
VALUE**

**Extra discounts
for BULK orders!**

- **Three selectable resolutions - Fine, Super-fine, Standard (Default is FINE)**

- High Resolution Mode Selectable: 5g Accuracy on EM-30KAM, 10g Accuracy on EM-60KAL, 20g Accuracy on EM-150KAL
- Clearly Visible Display with White Backlight
- Portable Lightweight Body
- Auto Power Off (scale switches off automatically after a period of inactivity)
- Rotating Indicator (to improve viewing display from the back or side)
- Two Platform Sizes (300 x 350 mm and 400 x 500 mm)
- Convenient Counting Function (able to count the number of objects with the same weight, based on a predetermined unit weight)

Specifications	EM-30KAM	EM-60KAL	EM-150KAL
Price (ex GST)	\$340	\$400	\$400
Part Number	06500300	06500200	06500100
Calibration	External	External	External
Capacity	30kg	60kg	150kg
Adjustable Resolution	2g / 5g / 10g	5g / 10g / 20g	10g / 20g / 50g
Dimensions	300(W)x560(D)x450(H)	400(W) x 500(D) x 750(H)	
Pan Size	300mm x 350mm	400mm x 500mm	
Power Supply	AC Adaptor TB-S200A and internal rechargeable battery (included)		

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
EM OP-03 RS232 Interface (to be factory fitted only)	06500011	\$60
Option OP-03 includes factory fitting charge, soldering required.	LB	\$30
EM OP-12 Tilting Indicator Bracket	06500012	\$60
EM OP-14 Desktop stand	06500013	\$60
EM OP-17 5m Loadcell extension cable	06500014	\$60
Rechargeable battery (Approx. 200 hours)	1EBGFP620	\$30

FG Series Platform Scales



*Floor Platform and
Bench Mount
models!*

FG-150KAL




FG-60KBM

Trade Approval
NMI #6/9C/289



Options



- **NMI Trade Approved except for Hi-Res 31K model**
- Trade Approved models supplied as standard
- Three selectable weighing resolutions
- Display column and Tilt display pod (FG-KA only)
- Optional RS-232C and Comparator Output (FG-23/FG24)

- Comparator function
- Filtering function
- Full digital calibration
- External Calibration

Specifications	FG-30KAM	FG-30KBM	FG-60KAM	FG-60KBM	FG-150KAM
Price (ex GST)	\$805	\$805	\$805	\$805	\$805
Part Number	03175700	03175750	03175710	03175760	03175720
Calibration	External	External	External	External	External
Capacity	30kg	30kg	60kg	60kg	150kg
Resolution NMI Approved	0.01kg	0.01kg	0.02kg	0.02kg	0.05kg
Adjustable Resolution	2g/5g/10g	2g/5g/10g	5g/10g/20g	5g/10g/20g	10g/20g/50g
Dimensions	KAM: 300(W) x 624(D) x 781(H); KBM: 380(W) x 464(D) x 118(H) mm				
Pan Size	300mm x 380mm				
Serial Cable	DIN Male to DB9 Female (03000002)				
Power Supply	AC Adaptor TB-S200A (incl.) or 4 x C size batteries (not incl. Approx. 150 hrs)				

*NMI Versions also require trade verification - fees apply

Specifications	FG-31KAM	FG-31KBM	FG-60KAL	FG-150KAL	FG-150KBM
Price (ex GST)	\$955	\$955	\$850	\$850	\$805
Part Number	03175790	03175780	03175730	03175740	03175770
Calibration	External	External	External	External	External
Capacity	30kg	30kg	60kg	150kg	150kg
Resolution NMI Approved	non NMI approved models		0.02kg	0.05kg	0.05kg
Adjustable Resolution	1g		5g/10g/20g	10g/20g/50g	10g/20g/50g
Dimensions	KAM: 300(W)x624(D)x781(H); KBM: 380(W)x464(D)x118(H); KAL: 390(W)x771(D)x781(H) mm				
Pan Size	300mm x 380mm		390mm x 530mm		300mm x 380mm
Serial Cable	DIN Male to DB9 Female (03000002)				
Power Supply	AC Adaptor TB-S200A (incl.) or 4 x C size batteries (not incl. Approx. 150 hrs)				

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable DIN Male to DB9 Female	03000002	\$55
FG-23 RS232 Interface option	06145101	\$220
FG-24 RS232 Interface & Comparator option	06145102	\$245



HVW-C / HVW-CP Series

Multi-functional Platform Scales



Trade Approval (HV Only)
NMI #6/9C/317



(Base)




HVW-C Series



HVW-CP Series

Option



- Bright and multi-coloured 5-step LED comparator lights
- Auto-tare and negative comparison function
- Highly-visible, LCD display with white backlight
- Universal Flexi Coms (UFC) function
- Quick and easy settings using the alphanumeric keypad
- Built-in thermal printer for the HV/HW-CP series
- IP65 dust & waterproof base with a stainless steel (SUS430) pan
- Three slots for optional data communication interfaces
- Bluetooth interface module coming soon



Integrated printer in HV/HW-CP models

Specifications	HV-15KC	HV-60KC	HV-200KC	HV-15KCP	HV-60KCP	HV-200KCP
Price (ex GST)	\$1,045	\$1,130	\$1,290	\$1,270	\$1,355	\$1,515
Part Number	03152300	03152400	03152500	03152301	03152401	03152501
Calibration	External			External		
Capacity	15kg/6kg/3kg	60kg/30kg/15kg	220kg/150kg/60kg	15kg/6kg/3kg	60kg/30kg/15kg	220kg/150kg/60kg
Resolution	5g/2g/1g	20g/10g/5g	100g/50g/20g	5g/2g/1g	20g/10g/5g	100g/50g/20g
Dimensions	275(W)x474(D)x368(H)	330(W)x621(D)x771(H)	390(W)x712(D)x773(H)	275(W)x474(D)x368(H)	330(W)x621(D)x771(H)	390(W)x712(D)x773(H)
Pan Size	250mm x 250mm	330mm x 424mm	390mm x 530mm	250mm x 250mm	330mm x 424mm	390mm x 530mm
Includes Printer	No			Includes Built-in Printer		
Power Supply	AC Adaptor TB-S200A (included) or 4 x D size batteries (not included)			AC Adaptor TB-S200A (included)		

Specifications	HW-10KC	HW-60KC	HW-200KC	HW-10KCP	HW-60KCP	HW-200KCP
Price (ex GST)	\$945	\$1,030	\$1,190	\$1,170	\$1,255	\$1,415
Part Number	03162100	03162200	03162300	03162101	03162201	03162301
Calibration	External			External		
Capacity	10kg	60kg	220kg	10kg	60kg	220kg
Resolution	1g	5g	20g	1g	5g	20g
Dimensions	275(W)x474(D)x368(H)	330(W)x621(D)x771(H)	390(W)x712(D)x773(H)	275(W)x474(D)x368(H)	330(W)x621(D)x771(H)	390(W)x712(D)x773(H)
Pan Size	250mm x 250mm	330mm x 424mm	390mm x 530mm	250mm x 250mm	330mm x 424mm	390mm x 530mm
Includes Printer	No			Includes Built-in Printer		
Power Supply	AC Adaptor TB-S200A (included) or 4 x D size batteries (not included)			AC Adaptor TB-S200A (included)		

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
HV/HW-03C OP-03 RS232C interface	03152320	\$115
HV/HW-02C OP-02 USB interface	03152310	\$125
HV/HW-04C OP-04 Comparator relay interface	03152330	\$345
HV/HW-11C Wall mount bracket	03152340	\$225
HV/HW-13 large roller conveyor (for 200kg model)	03152604	\$695
HV/HW-14 medium roller conveyor (for 60kg model)	03152603	\$695
HV/HW-C Paper rolls (Pack of 5)	AX-PP147-S	\$92

HV-CWP Series

Waterproof Platform Scales



Bright 5-step LED comparator lights.



IP65 Rated Platform Scale

- IP65 dust & waterproof with SUS304 surface
- High speed measurements (1 second)
- Counting mode and accumulation function
- Freely adjustable display angle
- Auto-tare and negative comparison function
- Quick and easy settings using the alphanumeric keypad
- Bright and multi-coloured 5-step LED comparator lights
- *Bluetooth interface module coming soon*



Options



Specifications	HV-15KCWP	HV-60KCWP	HV-200KCWP
Price (ex GST)	\$1,925	\$2,130	\$2,355
Part Number	03152600	03152700	03152800
Capacity	3 / 6 / 15kg	15 / 30 / 60kg	60 / 150 / 220kg
Resolution	0.001 / 0.002 / 0.005kg	0.005 / 0.01 / 0.02kg	0.02 / 0.05 / 0.1kg
Dimensions	250(W) x 470(D) x 430(H) mm	330(W) x 616(D) x 752(H) mm	390(W) x 722(D) x 752(H) mm
Pan Size	250 x 250 mm	330 x 424 mm	390 x 530 mm
Power Supply	AC Mains (100-240 V)		

Accessories	Part Number	Price (ex GST)
Serial Cable Wire connection for terminal to DB9 Female	03000004	\$55
HV-CWP OP-03 RS232C interface	03152602	\$295
HV-CWP OP-02 USB interface	03152601	\$105
HV-CWP OP-04 Comparator output	03152506	\$345



SE Series


IP68 Washdown Platform Scales



Trade Approval
NMI #6/4C/276



Options



NEW! SE-150KL-W Wall Mount scale



Caster wheels and lock option
for SE/SC scales (4 wheels)

Push handle option available
Enquire with Account Manager

- Trade Approved model supplied as standard
- Water/Dust proof for less than a dry area scale!
- Washdown IP68 construction for easy cleaning
- High speed stabilization of 1 second
- Battery operated (Approx. 5000 hours without RS-232)
- Supersized LCD of 39 mm character height
- Corrosion-resistant load cell (Aluminium anodized and coated with epoxy resin with protective silicon over wiring)
- Comparator function, Counting function, Automatic power off
- AC Power Adaptor option available (*for non trade models only*)
- *Bluetooth interface module coming soon*

Specifications	SE-30KAM	SE-60KAM	SE-150KAM	SE-60KAL	SE-150KAL	SE-150KL-W
Price (ex GST)	\$895	\$895	\$895	\$895	\$895	\$795
Part Number	06160900	06161000	06160100	06160300	06160200	06160201
Calibration	External	External	External	External	External	External
Capacity	30kg	60kg	150kg	60kg	150kg	150kg
Resolution NMI Approved	10g	20g	50g	20g	50g	N/A
Adjustable Resolution	5g/10g	10g/20g	20g/50g	10g/20g	20g/50g	20g/50g
Dimensions	300(W) x 543(D) x 717(H) mm			390(W) x 688(D) x 717(H) mm		
Pan Size (SUS430)	300mm x 380mm			390mm x 530mm		
Power Supply	6 x D size batteries (included)					

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable Wire connection for terminal to DB9 Female	03000004	\$55
SCSE OP-02 Quick USB Interface (cable not included)	06160401	\$220
SCSE OP-03 RS-232C + Comparator relay output	06160402	\$325
SC-D Indicator only (bracket not included) <i>Non Trade Indicator</i>	06163800	\$510
SCSE OP-04 wall mount bracket	06163810	\$90
SCSE Four caster wheels & lock option	06160408	\$149
AC power adaptor option	06160510	\$170
(NB: <i>non trade only and with the adaptor the scale becomes IP65</i>)		

SC Series

IP68 Washdown Platform Scales



SUS304 Stainless steel frame and weigh pan


**Excellent
Resistance
to Hostile
Environments!**



Trade Approval
NMI #6/4C/276



Options



- **Trade Approved model is supplied as standard**
- Water/Dust proof for less than a dry area scale!
- Washdown construction for easy cleaning
- Battery operated (Approx. 5000 hours or 2500 hours if RS-232 is used)
- IP68 dust and water-proof: Submersible! (1m under water for 24 hours!)
- Frame and weigh pan is stainless steel SUS304
- Supersized LCD of 39 mm character height
- AC Power Adaptor option available (*for non trade models only*).
- Comparator function, Counting function, Automatic power off
- Corrosion-resistant load cell (Aluminium anodized and coated with epoxy resin; protective silicon over wiring)
- Indicator SC-D is also sold separately. (*Refer to indicators page*)
- *Bluetooth interface module coming soon*

Specifications	SC-30KAM	SC-60KAM	SC-150KAM	SC-60KAL	SC-150KAL
Price (ex GST)	\$1,640	\$1,640	\$1,640	\$1,745	\$1,745
Part Number	06160800	06160400	06160500	06160600	06160700
Calibration	External	External	External	External	External
Capacity	30kg	60kg	150kg	60kg	150kg
Resolution NMI Approved	10g	20g	50g	20g	50g
Adjustable Resolution	5g/10g	10g/20g	20g/50g	10g/20g	20g/50g
Dimensions	300(W) x 543(D) x 717(H) mm			390(W) x 688(D) x 717(H) mm	
Pan Size (SUS304)	300mm x 380mm			390mm x 530mm	
Power Supply	6 x D size batteries (included)				

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable Wire connection for terminal to DB9 Female	03000004	\$55
SCSE OP-02 Quick USB Interface (cable not included)	06160401	\$220
SCSE OP-03 RS-232C + Comparator relay output	06160402	\$325
SC-D Indicator only (bracket not included) <i>Non Trade Indicator</i>	06163800	\$510
SCSE OP-04 wall mount bracket	06163810	\$90
SCSE Four caster wheels & lock option	06160408	\$149
AC power adaptor option (non trade only and with the adaptor the scale becomes IP65)	06160510	\$170



SW Series


Super Wash Down Scales



Trade Approval
NMI #6/4C/274



Options



SW Bracket Option



Cleaning with pressurized jet

Withstands extremely damp environments

Stainless steel sensor



5-level comparator lamps

NMI TRADE APPROVED
IP69K Stainless steel
Check weighing applications
Food applications
Ergonomic design

- Trade approved model supplied as standard
- Ultimate protection against the effects of condensation as well as water
- Stainless steel weighing pan, frame and load cell
- Rugged and adjustable (0°, 30°, 60° or 90°) indicator bracket
- Touch sensitive capacitive keys to prevent damage from sharp objects
- Auto-tare function to facilitate consecutive check weighing
- Bright, multicoloured LED display with 5-step comparator lamps
- Frame and weigh pan are stainless steel SUS304 and loadcell is SUS630
- Three sizes of base units, which are also available separately
- Pole stand attachable to either the short or long side of the platform
- The display unit available separately as an IP69K indicator for high pressure washdown

Specifications	SW-6KS	SW-15KS	SW-15KAM	SW-30KAM	SW-60KAM	SW-150KAM	SW-60KAL	SW-150KAL
Price (ex GST)	\$2,250	\$2,250	\$2,810	\$2,810	\$2,810	\$2,810	\$3,370	\$3,370
Part Number	06161100	06161800	06161200	06161300	06161400	06161500	06161600	06161700
Calibration	External	External	External	External	External	External	External	External
Capacity	6kg	15kg	15kg	30kg	60kg	150kg	60kg	150kg
Resolution NMI Approved	2g	5g	5g	10g	20g	50g	20g	50g
Adjustable Resolution	0.5g/1g/2g	1g/2g/5g	1g/2g/5g	2g/5g/10g	5g/10g/20g	10g/20g/50g	5g/10g/20g	10g/20g/50g
Dimensions	250(W)x480(D)x354(H)		300(W)x601(D)x723(H) mm				390(W)x751(D)x723(H)	
Pan Size (SUS304)	250mm x 250mm		300mm x 380mm				390mm x 530mm	
Power Supply	Rechargeable battery (included)							

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable Wire connection for terminal to DB9 Female	03000004	\$55
SW OP-03 RS-232C serial interface + comparator output	06162001	\$380
SW OP-04 RS422/485 interface	06162002	\$380
SW OP-11 Bench/Wall bracket	06162004	\$220
SW-D Indicator display (without bracket) <i>Non Trade Indicator</i>	06162100	\$1380
Rechargeable Battery (Approx. 90hrs)	ECEB-6V-YUASA	\$40

FS-Ki Series




Checkweighing IP65 Scales



**Ultra fast weighing response
Just 0.5 seconds!**



Trade Approval
NMI #6/4C/250



Options



- Trade Approved model supplied as standard
- Analog sweep display - 3 modes
- Memory for 99 products
- Large LCD display with backlight
- Numeric keypad for easy programming
- IP65 Dust and Waterproof
- Large comparator lights & Buzzer
- Comparator function with LO, HI or OK
- **NEW! FS-60Ki and FS-150Ki**

Large column (550mm)
option shown here with
regular column (300mm)



Specifications	FS-6Ki	FS-15Ki	FS-15Ki-L	FS-30Ki	FS-60Ki	FS-150Ki
Price (ex GST)	\$1,630	\$1,630	\$1,855	\$1,855	\$2,195	\$2,195
Part Number	03078000	03078010	03078030	03078020	03078060	03078070
Calibration	External	External	External	External	External	External
Capacity	6kg	15kg	15kg	30kg	60kg	150kg
Resolution NMI Approved	0.002kg	0.005kg	0.005kg	0.01kg	0.02kg	0.05kg
Adjustable Resolution	0.5g/1g/2g	1g/2g/5g	1g/2g/5g	2g/5g/10g	10g/20g/50g	20g/50g/100g
Dimensions	250(W) x 414(D) x 496(H)mm		380(W) x 464(D) x 496(H)mm		380(W) x 740(D) x 740(H)mm	
Pan Size	250mm x 250mm		380mm x 300mm		530mm x 390mm	
Power Supply	AC Mains (included) or rechargeable battery (included)					


*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
Serial Cable Wire connection for terminal to DB9 Female	03000004	\$55
FS OP-03i RS232 + Relay Output	03078001	\$270
FS OP-04i RS422/485 + Relay Output	03078002	\$325
Rechargeable Battery (Approx. 80 hrs)	ECEB-6V	\$20
FS-D Wall Mounting Bracket	MC07042.005	\$60
FS-D Indicator Display (bracket included) <i>Non Trade Indicator</i>	06132500	\$1380
FS Large Column option (550mm)	03078004	\$295



Portable Scale & Baseworks

SA Series, SB Base, SC Base, SW Base

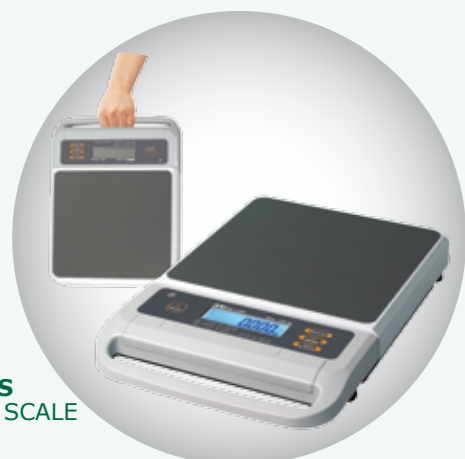

SA SERIES
PORTABLE SCALE


- One scale for both precise 0.001 kg / 1g readability and up to 3 kg/3000 g (smart range), and high-capacity weighing
- LCD display with backlight (24 mm character height), Which is 180-degrees reversible
- Easy to carry around to use at various locations
- Low profile (approx. 73 mm) that can be stored in narrow spaces or propped against a wall
- Four weighing ranges (readabilities) selectable
- Auto power ON/OFF function
- Battery life indicator
- Optional RS-232 output

Specifications	SA-30K	SA-60K	SA-150K
Price (ex GST)	\$995	\$995	\$995
Part Number	06330300	06330200	06330100
Capacity	30kg	60kg	150kg
Resolution	1g resolution up to 3kg, and 10g resolution for greater than 3kg		
Dimensions	330(W) x 509(D) x 84(H) mm		
Pan Size	330mm x 330mm		
Power Supply	AC Adaptor TB-S200A (included) or 4 x D batteries (not included)		

Accessories	Part Number	Price (ex GST)
OP-03 RS232C interface	06330101	\$120



Trade Approval
NMI #6/9C/291

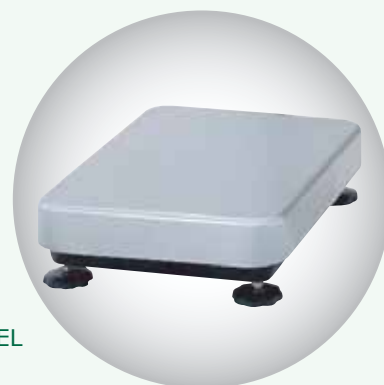


SB IP65 PAN
PAINTED MILD STEEL


- Cast aluminium powder coated
- Can be connected to any of the A&D digital indicators
- Trade approved by NMI Australia
- Stainless steel pan
- Enclosed Aluminium loadcell for IP-65 protection
- Built to withstand the rigours of industrial usage

Specifications	SB-15K10-D	SB-60K11-D	SB-100K12-D	SB-200K12-D
Price (ex GST)	\$565	\$620	\$675	\$675
Part Number	03132203D	03132303D	03132403D	03132503D
Capacity	15kg	60kg	100kg	220kg
Pan Size	250mm x 250mm	330mm x 424mm	390mm x 530mm	

*NMI Versions also require trade verification - fees apply



Trade Approval
NMI #6/4C/276

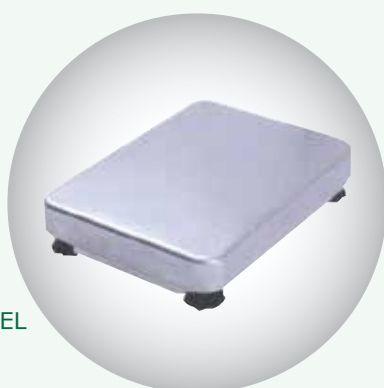


SC IP68
STAINLESS STEEL

- Stainless Steel baseworks with IP-68 rating
- Can be used with any of A&D's digital indicators
- Epoxy coated Aluminium loadcell
- Built to withstand the rigours of industrial usage

Specifications	SC-30BM	SC-60BL	SC-150BL
Price (ex GST)	\$785	\$890	\$1,005
Part Number	06160850	06160650	06160750
Capacity	30kg	60kg	150kg
Pan Size	300mm x 380mm	390mm x 530mm	390mm x 530mm

*NMI Versions also require trade verification - fees apply

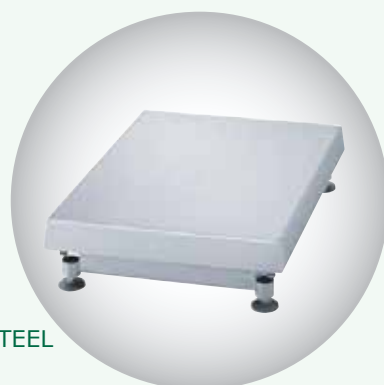

SW IP69K
STAINLESS STEEL

- Premium resistance to hostile environments
- Can be connected to any of the A&D digital indicators
- Built to withstand the rigours of industrial usage
- Stainless Steel loadcell

Specifications	SW-60KBM	SW-150KBM	SW-60KBL	SW-150KBL
Price (ex GST)	\$1,665	\$1,665	\$2,225	\$2,225
Part Number	06162200	06162300	06162400	06162500
Capacity	60kg	150kg	60kg	150kg
Pan Size	300mm x 380mm		390mm x 530mm	

*NMI Versions also require trade verification - fees apply

AD-300 & AD-600 Series

Accurate Platform Scales



AD-300 & AD-600
Platform Scales

Trade Approval
NMI #6/9C/250A
(AD300KA4 only)



Option



- Large capacity stainless steel platform
- Low profile design allows for easy access
- Powered by TB-S200A adaptor
- Wall mount configuration available
Cable length is approx. 4m

Specifications	AD-300KA4	AD-600KA4
Price (ex GST)	\$3,025	\$3,025
Part Number	03113600	03113500
Calibration	External	External
Capacity	300kg	600kg
Resolution	0.1kg	0.1kg
Pan Size	600mm x 700mm	600mm x 700mm
Product NMI	Trade Approved	Not Approved

*NMI Versions also require trade verification - fees apply

Options	Part Number	Price (ex GST)
AD-300KA4 with wall mount (without column)	03113600-W	\$3,025
AD-600KA4 with wall mount (without column)	03113500-W	\$3,025

SD-200

Warehouse Trolley Scales



- High Weighing capacity (200kg maximum)
- Fully Portable and easy to maneuver
- Sturdy construction and high stability
- Battery operated indicator

Specifications	SD-200
Price (ex GST)	\$1,775
Part Number	06163000
Capacity	200kg
Resolution	0.5kg
Dimensions	900(W) x 600(D) x 900(H) mm
Platform Size	900mm x 600mm
Power Supply	6 x C size batteries included

ex Japan



ELP-700 / ELP-1200 Series

Low Profile Pallet Scales for Dry Areas



Trade Approval
NMI #6/9C/220B

Indicator



NMI
#5778



Option



NEW! ELP-700

700mm x 700mm platform



ELP-1200

1200kg Weighing in dry areas



Feet
option
(swivel)

- Low profile design allows for easy access
- Painted steel platform ideal for dry areas
- Not suitable for pit mount

- Loadcell cable 5m
- Ramp options available

Supplied uncalibrated - Calibration fees apply

Specifications	ELP-700 Base Only	ELP-1200 Base Only
Price (ex GST)	\$795	\$1,130
Part Number	03010200 BASE ONLY (PAINTED)	03010105 BASE ONLY (PAINTED)
Capacity	600kg x 0.2kg or 300kg x 0.1kg	1200kg x 0.5kg
Construction	Mild Steel	Mild Steel
Material Finish	Painted	Painted
Platform Dims	700mm x 700mm	1200mm x 1200mm
Platform Fixing	Welded to base frame	Welded to base frame
Weight of scale	Approx. 49kg	Approx. 95kg
Load cells	4 x ADA-K500 load cells	4 x ADALC1-T1 shear beam
Application Area	Lighter Capacity in Dry Areas	
Application	Not suitable for pit mount	
Base Height	100mm to 120mm	
Corner Adjustment	Side mounted junction box	


*NMI Versions also require trade verification - fees apply
Pallet Scales can be set to 600kg x 0.2kg

Accessories	Part Number	Price (exGST)
ELP-1200 & AD4406A (Trade Approved) Combo	03010105 & 06138600	\$1,475
ELP-700 & AD4406A (Trade Approved) Combo	03010200 & 06138600	\$1,145
Levelling leg (old style) Dia = 35mm	MC07019.000	\$45
Levelling leg (swivel style) Dia = 58mm	MC07032.000	\$45
OP-12 Stainless steel wall bracket	03176100	\$60
Cast loadcell 7 pin plug for indicator (has holes)	EAJM-NJC207-PF	\$65
Loadcell cable with 7 pin plug	EMKO-11915	\$80
Painted ramp to suit ELP-1200 (900mm or 1200mm)	03010106	\$POA

*NMI Versions also require trade verification - fees apply

A&D 3000 Series

Low Profile Pallet Scales

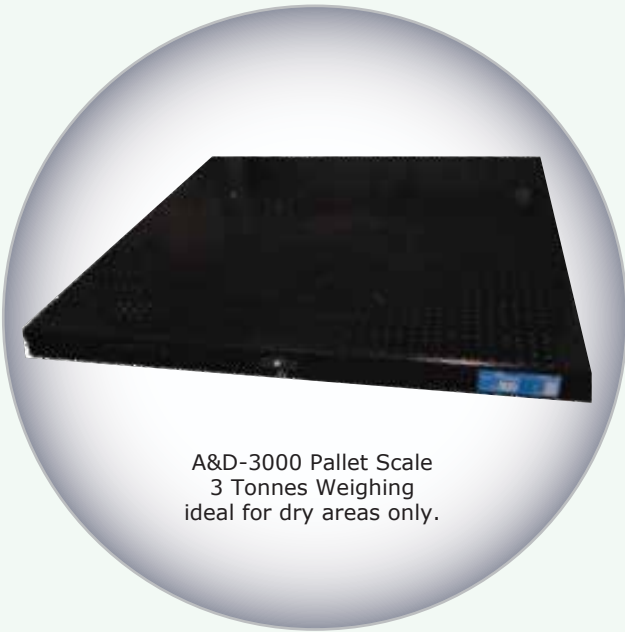


A&D-3000 Pallet Scale
3 Tonnes Weighing
ideal for dry areas only.



AD-4406A Indicator
Combo option
(bracket is not
included as standard)

Supplied uncalibrated

- Approved for Trade Use*
- High Strength in Dry Areas
- Loadcell cable 5m
- Ramp options available
- Low profile design allows for easy access

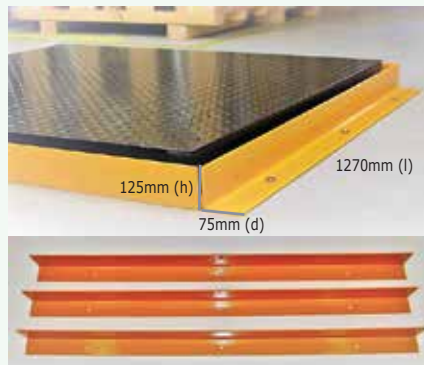

Forklift barrier option
sold individually.

Trade Approval
NMI #6/9C/220B



Indicator

NMI #5778



Option



Specifications	A&D-3000 Base Only	A&D-3000 Base Only	A&D-3000 Drop Centre with Ramp Base
Price (ex GST)	\$1,575	\$4,050	\$4,050
Part Number	03010102	03010206	03010205
Platform Dims	1200mm x 1200mm	1500mm x 1500mm	1200mm x 1200mm with drop centre
Capacity	3T x 1kg or 1.5T x 0.5kg*	3T x 1kg or 1.5T x 0.5kg*	1.2T x 0.5kg
Material Finish	Painted		
Construction	Mild Steel		
Platform Fixing	Welded to base frame		
Weight of scale	Approx. 110kg		
Load cells	ADALC1-T1		
Application Area	High Strength in Dry Areas		
Application	Not suitable for pit mount		
Base Height	140mm to 155mm		
Corner Adjustment	In-line cable summing unit		

NMI Versions also require trade verification - fees apply

*Trade Approved Setup – Single Range 1500kg x 0.5kg or 3000kg x 1 kg and dual range 1500kg/3000kg x 0.5/1kg (other trade and non-trade setups available)

Accessories	Part Number	Price (ex GST)
A&D-3000 (1200x1200) & AD4406A (Trade Approved) Combo	03010102 & 06138600	\$2,010
A&D-3000 (1500x1500) & AD4406A (Trade Approved) Combo	03010206 & 06138600	\$4,480
A&D-3000 (drop centre with ramp) & AD4406A (Trade) Combo	03010205 & 06138600	\$4,480
Painted ramp to suit standard A&D3000 (1200mm x 900mm)	03010104	\$1,200 NETT
Forklift barrier option (sold individually)	03014002	\$215
Levelling leg (old style) Dia = 35mm	MC07019.000	\$45
Levelling leg (swivel style) Dia = 58mm	MC07032.000	\$45
A&D3000 summing unit 5m cable (no plate)	EMKO-11910	\$130
OP-12 Stainless steel wall bracket	03176100	\$60
Cast loadcell 7 pin plug for indicator (has holes)	EAJM-NJC207-PF	\$65
Cast loadcell 7 pin socket for basework (has pins)	EAJM-NJC207-RM	\$65

*NMI Versions also require trade verification - fees apply



ELP-3000 Series

Low Profile Pallet Scales for Wet & Dry Areas

Pallet Scales



Trade Approval
NMI #6/9C/220B



Indicators



(AD-4407)



AD4406A
#5778
AD4407
#5451




(AD-4407)



Option



(AD-4406A)

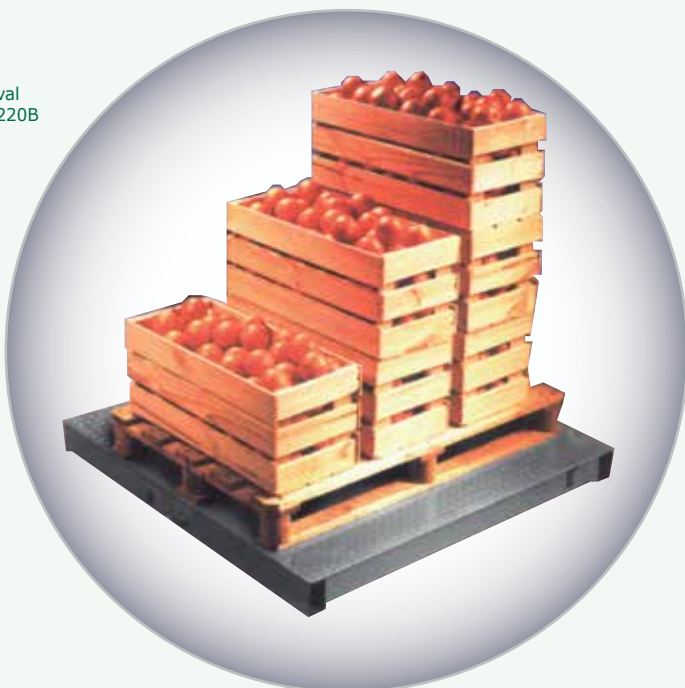

Base & Indicator Combo*
AD-4407 or AD-4406A

- Full SUS430 Stainless Steel Loadcells
- Low profile design allows for easy access
- Suitable for use with all A&D indicators
- Ramp options available
- Loadcell cable 5m

Supplied Uncalibrated

**Non standard sizes and capacities available.
Please inquire**

Specifications

ELP-3000 Base Only

Price (ex GST)	\$2,665
Part Number	03010201 BASE ONLY (GALVANISED, 3T capacity)
Price (ex GST)	\$6,680
Part Number	03010203 BASE ONLY (SUS304 Stainless Steel, Max. 2T capacity)
Capacity	3000kg x 1kg or 1500kg x 0.5kg*
Construction	Mild Steel
Material Finish	Galvanised
Platform Dims	1200mm x 1200mm
Platform Fixing	Screwed to base frame
Weight of scale	Approx. 115kg
Load cells	4 x LCM13-T001 SUS430 shear beam
Application area	Wet and Dry Areas
Application	Suitable for pit mount
Base Height	140mm to 155mm
Corner Adjustment	In-line cable summing unit

NMI Versions also require trade verification - fees apply

*Trade Approved Setup – Single Range 1500kg x 0.5kg, or 3000kg x 1 kg and dual range 600kg x 0.2kg , 1500kg/3000kg x 0.5/1kg (other trade and non-trade setups available)

Accessories	Part Number	Price (exGST)
ELP-3000 & AD4406A (Trade Approved, Galvanised) Combo	03010201 & 06138600	\$3,015
ELP-3000 & AD4407 (Trade Approved, Galvanised) Combo	03010201 & 06138700	\$3,335
Stainless steel ramp to suit ELP-3000 (900mm or 1200mm)	03010108	\$2,900
Galvanised ramp to suit ELP-3000 (900mm or 1200mm)	03010107	\$1,885
Painted ramp to suit ELP-3000 (900mm or 1200mm)	03010106	\$1,225
Forklift barrier option (sold individually 125 x 75 mm)	03014002	\$215
Levelling leg (swivel style) Dia = 58mm	MC07032.000	\$45
ELP3000 summing unit 5m cable with cover plate	EMKO-11909	\$175
OP-12 Stainless Steel wall bracket for AD-4406	03176100	\$60
In ground mounting plates	03010202	\$100
In ground pit surround 1200mm x 1200mm	03011200	\$430
Cast loadcell 7 pin plug for indicator (has holes)	EAJM-NJC207-PF	\$60
Cast loadcell 7 pin socket for basework (has pins)	EAJM-NJC207-RM	\$60

*NMI Versions also require trade verification - fees apply

***All combinations supplied uncalibrated
Bracket is not included with AD-4406**

OHT Series

Overhead Track Scales



Trade Approval
NMI #6/18/17C



OHT combinations are
supplied uncalibrated

**Ask us if you require
alternate capacities and rail lengths!**

- Quality galvanised finish
- Also available 300kg x 0.1kg NMI approved (longer leadtime for this)
- Waterproof track scale suitable for wet environments
- Choice of indicators to suit various applications
- Choice of optional bracket lengths. Standard are 200mm
- Weigh rail thickness: 13mm
- Can ONLY be Trade Verified AFTER installation
- Centre and End load compensation feature for accurate weighing

Specifications	OHT 300mm	OHT 600mm	OHT 1200mm
Price (ex GST)	\$3,010	\$3,010	\$3,010
Part Number	03020101	03020102	03020103
Capacity	600kg	600kg	600kg
Resolution	0.2kg	0.2kg	0.2kg
Weigh rail	300mm	600mm	1200mm

*NMI Versions also require trade verification - fees apply

IMPORTANT NOTE: OHT pre-despatch set up cost is \$160.00

Accessories	Part Number	Price (ex GST)
OHT 300mm rail & AD4407 combo	03020101 & 06138700	\$3,530
OHT 600mm rail & AD4407 combo	03020102 & 06138700	\$3,530
OHT 1200mm rail & AD4407 combo	03020103 & 06138700	\$3,530
OHT OP-01 125mm brackets (pair)	03022001	\$345
OHT OP-02 250mm brackets (pair)	03022002	\$345



AD-4401A / AD-4402 / AD-4404

AD Batching Indicators



IN PANEL



- High performance weighing / batching indicator
- High speed A/D convertor - 100 per second, High display resolution up to 1 in 16000
- High Internal A/D resolution of up to 1,000,000 counts
- Monitor & Control weighing & Batching using displayed or internal counts
- Fuzzy logic or standard Automatic Free Fall Compensation for consistent results
- Automatic weight or count accumulation
- Up to eight 350Ω load cells can be connected in parallel.
- **NMI Trade Approval pending**

Specifications	AD-4401A
Price (ex GST)	\$1,950
Part Number	06138308
Power	AC Mains
Dimensions	144(W) x 197(D) x 72(H) mm

*NMI Versions also require trade verification - fees apply



AD-4401A INDICATOR

Accessories*	Part Number	Price (ex GST)
AD-4401A OP-01 BCD output	06138311	\$475
AD-4401A OP-03 RS422/RS485 interface	06138313	\$475
AD-4401A OP-04 RS232C + current loop serial	06138314	\$475
AD-4401A OP-07 analog output	06138317	\$610
AD-4401A OP-23 Ethernet	06138323	\$610

*Please note: AD-4401A accessories do not fit the superseded AD-4401.



NMI #S503



IN PANEL



- Multi function from batch weighing to field bus networking applications
- Main display has 7-digit VFD with 18mm high characters
- Sub display has 108 x 5mm high characters to show values and comments
- Pre-programmed with multiple sequences and functions for filling machines and simple mixing
- Up to eight 350Ω load cells can be connected in parallel.
- Stores 100 data for raw materials and 100 data for recipes
- **OP-21 DeviceNet Interface is no longer available**

Specifications	AD-4402
Price (ex GST)	\$3,085
Part Number	06138400
Power	AC Mains
Dimensions	192(W) x 135(D) x 96(H) mm

*NMI Versions also require trade verification - fees apply



AD-4402 INDICATOR

Accessories	Part Number	Price (ex GST)
OP-01 Parallel BCD Output	06138401	\$755
OP-02 Relay Output	06138402	\$755
OP-03 RS422/RS485 interface	06138403	\$755
OP-04 RS232C + current loop serial	06138404	\$755
OP-05 Parallel I/O	06138405	\$755
OP-07 Analogue Output	06138407	\$855
OP-20 CC-Link Interface	06138420	\$1,295
OP-22 PROFIBUS interface	06138422	\$2,295



NMI #S503



- High performance advanced checkweighing indicator
- Up to 100 sets of target (OK weight), Hi, Lo and tare can be stored by code number
- Twin displays show weight and operational details
- Sealed keys keep out dust in industrial environments IP65 grade
- User programmable check-weighing modes to meet many specific requirements
- Up to eight 350Ω load cells can be connected in parallel.

Specifications	AD-4404
Price (ex GST)	\$3,085
Part Number	06139200
Power	AC Mains
Dimensions	192(W) x 135(D) x 96(H) mm

*NMI Versions also require trade verification - fees apply



AD-4404 INDICATOR

Accessories	Part Number	Price (ex GST)
OP-21 DeviceNet Interface	06139221	\$1,830

Additional AD-4404 Options: See AD-4402 Options

AD-4405 / AD-4406A / AD-4407

AD Indicators



- Ten keys for preset tare and units weighing setting etc
- Accumulative data can be stored into memory automatically or manually
- Comparator Function Upper/Lower, HiHi/Hi/OK/Lo/Lolo & comparison
- 2 weighing ranges selectable
- Up to four 350Ω load cells can be connected in parallel
- Optional Dot Matrix Printer
- RS-232 Interface comes as standard

Specifications	AD-4405
Price (ex GST)	\$1,170
Part Number	06138500
Power	AC Mains
Dimensions	275(W) x 159(D) x 111(H) mm

*NMI Versions also require trade verification - fees apply



AD-4405 INDICATOR

Accessories	Part Number	Price (ex GST)
OP-03 RS422/RS485 interface*	06138503	\$420
OP-05 RS232C + relay output*	06138505	\$420
OP-06 Dot Matrix Printer	06138506	\$790
OP-07 4-20mA Analog output	06138507	\$420

*Only one of these can be installed/fitted

- Powered by TB-S200A adaptor or alkaline C type battery
- Battery life 180 hours (LC 350ohms x 1); battery life 70 hours (LC 350ohms x 4)
- Accumulative data can be stored into memory automatically or manually
- Automatic batching and customer programming capability
- Up to four 350Ω load cells connected in parallel
- F1, F2 selectable function keys
- Optional stand/bracket available

Specifications	AD-4406A
Price (ex GST)	\$495
Part Number	06138600
Power	TB-S200A (included) C size battery (not included)
Dimensions	192(W) x 87(D) x 96(H) mm

*NMI Versions also require trade verification - fees apply



AD-4406A INDICATOR

Accessories	Part Number	Price (ex GST)
OP-03 RS422/RS485*	06138603	\$460
OP-04 programmable RS232C*	06138604	\$170
OP-05 RS232 & relay output*	06138605	\$460
OP-07 4-20mA analog output*	06138607	\$510
OP-12 stainless steel bracket (wall/desk)	03176100	\$60

*Only one of these can be installed/fitted

- Ideal for dust and waterproof weighing applications with IP65 grading
- NMI Trade approved scale
- Automatic batching and customer programming capability
- Counting function
- Up to eight 350Ω load cells can be connected in parallel
- RS-232 Interface comes as standard
- Bracket comes as standard

Specifications	AD-4407
Price (ex GST)	\$1,025
Part Number	06138700
Power	AC Mains
Dimensions	199(W) x 80(D) x 206(H) mm

*NMI Versions also require trade verification - fees apply



AD-4407 INDICATOR

Accessories	Part Number	Price (ex GST)
OP-03 RS422/RS485*	06138703	\$510
OP-05 RS232 & relay output*	06138705	\$510
OP-07 4-20mA analog output*	06138707	\$510

*Only one of these can be installed/fitted

NMI #S451



NMI #S778

IN PANEL



NMI #S451





AD-4408

AD Process Indicators



IN PANEL



- Various types of field network (fieldbus) modules can be installed
- High-performance digital filtering that eliminates the effects of strong vibration
- Compact, lightweight body makes it ideal for mounting into a control panel
- Dust and waterproof display (when mounted into a panel)
- Up to eight 350Ω load cells can be connected in parallel
- Highly tolerant against electromagnetic noise

Specifications	AD-4408*
Price (ex GST)	\$2,055
Part Number	06148000
Power	AC Mains
Dimensions	144(W) x 135(D) x 72(H) mm

*Anybus option available: check brochure for details



AD-4408



AD-4410

AD Process Indicators



IN PANEL



- Powerful vibration-cancelling function (High Performance Digital Filter)
- High speed sampling (100 times/second)/high accuracy
- Circuits equipped with powerful noise reduction
- Accurate linear correction function using high-order equations
- Up to eight 350Ω load cells can be connected in parallel
- Average holding function
- Comes equipped with Modbus-RTU

Specifications	AD-4410*
Price (ex GST)	\$2,055
Part Number	06134500
Power	AC Mains
Dimensions	144(W) x 110(D) x 72(H) mm

*Anybus option available: check brochure for details



AD-4410



AD-4329

Basic Weighing Indicators



NMI #S387



- The AD-4329 has triple range for scales with multiple weighing intervals
- The AD-4329 comes with RS-232 relay output as standard
- Check weighing mode (3 levels) to compare weighing data
- Set point comparison for batching applications
- Up to eight 350Ω load cells can be connected in parallel
- Accumulated data can be manually or automatically stored in the memory

Specifications	AD-4329
Price (ex GST)	\$915
Part Number	06139100
Power	AC Mains
Dimensions	192(W) x 165(D) x 96(H) mm

*NMI Versions also require trade verification - fees apply

Accessories	Part Number	Price (ex GST)
AD-4329 Comparator relay output	06139002	\$390

AD-4329



AD4430A / AD4430B / AD4430R

DIN Rail Indicators



- Powerful vibration-cancelling filter HPDF (High Performance Digital Filter)
- Dual HPDF
- Flow rate output
- Control I/O (6 inputs, 8 outputs) as standard
- USB interface to import/export function settings
- Averaging hold, peak hold and comparator functions
- DIN rail mounting type to install into control box
- Up to four 350Ω load cells can be connected in parallel

Specifications	AD-4430A
Price (ex GST)	\$1,025
Part Number	06149100
Power	24V DC
Dimensions	36(W) x 110(D) x 101(H) mm



AD-4430A INDICATOR
Analog output 4 to 20mA

- DIN rail mounted type ideal for insertion into control board
- Powerful vibration-cancelling function (High Performance Digital Filter)
- Control I/O (6 inputs, 1 outputs) as standard
- High speed sampling (1000 times per second) - High accuracy
- BCD input/output a standard feature (up to 1000 times/sec high speed output)
- Equipped with powerful noise suppression circuit
- Accurate linear correction function using high-order equations
- Up to four 350Ω load cells can be connected in parallel

Specifications	AD-4430B
Price (ex GST)	\$1,025
Part Number	06149000
Power	24V DC
Dimensions	36(W) x 110(D) x 101(H) mm



AD-4430B INDICATOR
BCD output

- Powerful vibration-cancelling filter (High Performance Digital Filter)
- Dual HPDF
- Dual flow rate output
- Sequential filling/dispensing measurement capability
- Internal setpoint control
- Active free fall compensation
- I/O points (6 inputs, 8 outputs) as standard
- Remote I/O connectivity for PLC input and output
- USB interface to import/export function settings
- Averaging hold, peak hold and comparator functions
- DIN rail mounting type to install into control box
- Up to four 350Ω load cells can be connected in parallel

Specifications	AD-4430R
Price (ex GST)	\$1,025
Part Number	06149200
Power	24V DC
Dimensions	36(W) x 110(D) x 101(H) mm



AD-4430R INDICATOR
Modbus RTU (RS-485)



AD-4530

Digital Indicator for Strain Gauge Sensors



Option



- Digital Zero (DZ) stores zero data at any measurement point. This function can also be used to tare weight.
- Measurement can simply be restarted when it was interrupted by a loss of power.
- Power on zero function adjusts to zero when the power is turned on.
- Digital filter provides stable measurement results.
- Digital span calibration. Easy calibration just by inputting the rated output of a sensor. No need to use a mass.
- Unit characters - Up to five alphanumeric characters can be added to serial output.
- Up to three 350Ω load cells can be connected in parallel
- Comparator function displays and outputs HI, OK and LO according to upper and lower limit settings. Hysteresis width and time can be set to prevent chattering on the output terminal. This reduces load on the relay circuit.
- Various data output (optional). Necessary data can be easily obtained using optional comparator relay output, serial output (RS-485/RS-232C), D/A voltage output and D/A current output.

Specifications	AD-4530
Price (ex GST)	\$450
Part Number	06138540
Power	AC Mains
Dimensions	96(W) x 48(H) x 120(D) mm



AD-4530

Accessories	Part Number	Price (ex GST)
AD-4530/31B Relay Output	06138532	\$85
AD-4530/31B RS485	06138533	\$145
AD-4530/31B RS-232C	06138534	\$75
AD-4530/31B 4-20mA Analog Output	06138537	\$100
AD-4530/31B Relay Output + RS-485 + 4-20mA Analog O/P	06138535	\$160
AD-4530/31B Relay Output + RS-232C + 4-20mA Analog O/P	06138536	\$160



AD-4531A / AD-4531B

AD Indicators

**Extra discounts
for BULK orders!**



Option



- Digitally processed signals with 16 times/s A/D conversion
- Peak hold and hold capability
- "Hold Mode" data stored digitally to prevent drooping on display and analog output
- Data digitally held in memory. Hold and analog output are stored without any drooping.
- Variety of data outputs: Average, digital peak hold, analog, hysteresis compensation comparison.
- Compact DIN size body for digital key operating greater installation flexibility.
- Averaging time and display update rate can be selected for various applications.
- Analog low-pass filter removes noise from signal inputs.
- Analog output with scaling and offset functions
- Up to three 350Ω load cells can be connected in parallel

Specifications	AD-4531A
Price (ex GST)	\$850
Part Number	06138541
Power	AC Mains
Dimensions	96(W) x 157(D) x 48(H) mm



AD-4531A

Multi Purpose

- Suitable for load, pressure, torque or tension measurement plus more
- Digital span calibration possible without using an actual load
- Zero correction value can be backed up
- Various output options available
- Performs A/D conversion at 100 times per second
- Up to three 350Ω load cells can be connected in parallel

Specifications	AD-4531B
Price (ex GST)	\$650
Part Number	06138531
Power	AC Mains
Dimensions	96(W) x 128(D) x 48(H) mm



AD-4531B

for Strain Gauge Sensors

Accessories	Part Number	Price (ex GST)
AD-4530/31B Relay Output	06138532	\$85
AD-4530/31B RS485	06138533	\$145
AD-4530/31B RS-232C	06138534	\$75
AD-4530/31B 4-20mA Analog Output	06138537	\$100
AD-4530/31B Relay Output + RS-485 + 4-20mA Analog O/P	06138535	\$160
AD-4530/31B Relay Output + RS-232C + 4-20mA Analog O/P	06138536	\$160

AD-4532B

AD Process Indicators



- High Speed Weighing- 2000 updates per second
- Wide Variety of Standard Data I/O- Analog Amplifier Voltage Output (+/-10v), D/A Analog Voltage Output (+/-10v), Comparator Output and a Modbus RTU I/O
- 5 Level Comparator- Multi level settings for a multi level test procedure
- Displayed Upper and Lower Setting-Immediate recall of test parameters
- 4 Different Hold Functions-Select from Peak, Bottom, Sample, Bipolar Hold
- Up to four 350Ω load cells can be connected in parallel

Specifications	AD-4532B
Price (ex GST)	\$1,715
Part Number	06230700
Power	AC Mains
Dimensions	96(W) x 168(D) x 96(H) mm

AD-4532B INDICATOR



IN PANEL



Accessories	Part Number	Price (ex GST)
OP-01 BCD Output (40 pin FCN connector)	06230504	\$340
OP-04 RS232C (D-Sub 9 pin)	06230505	\$340
OP-07 D/A Analog Volt/Current Output (+/-10V)	06230503	\$455
OP-08 Ethernet interface (RJ-45)	06230506	\$800

AD-4541-V/I

Ultra Slim Analog Signal Conditioner



- Ultra-slim, lightweight and easy-to-install
- Up to four 350Ω load cells can be connected in parallel
- Calibration can be performed with the ZERO / SPAN volume controls or the CAL switch
- Wide-range zero adjust. ($\pm 1.6\text{mV/V}$) / span adjust. ($0.4\sim 3.2\text{mV/V}$) for use with various bridge type sensors
- No crimping terminal is necessary because a spring clamp terminal block is used for easy wiring.

Specifications	AD-4541-I	AD-4541-V
Price (ex GST)	\$575	\$575
Part Number	06134200	06134300
Output	4mA to 20mA	-2V to +2V
Power	24V DC	
Dimensions	45(W) x 122(D) x 24(H) mm	



AD-4541-V/I SIGNAL CONDITIONERS



FSi-D / SW-D / SC-D

Waterproof Indicators with Rapid Stabilisation

The FS-D, which comes with a desktop/wall-mount stand and a connector plug, can even be used with platforms scales other than A&D's. The eight preset capacities range from 6 kg (15 lb) to 1,500 kg (3,500 lb) and the three resolutions from 1/3,000 to 1/12,000 (or 1/15,000) (NB: only one of each can be selected at a time). Up to four 350Ω load cells can be connected in parallel. Capacities are selectable from fixed range and maximum capacity is 1500kg.



Specifications	FSi-D DISPLAY
Price (ex GST)	\$1,380
Part Number	06132500
Power	AC Mains Rechargeable battery (included)
Bracket	Included
Dimensions	250(W) x 130(D) x 150(H) mm



**FSi-D IP65
INDICATOR
NON TRADE**

Accessories	Part Number	Price (ex GST)
OP-03 RS232 & relay output	03078001	\$270
OP-04 RS422 / 485 + relay output	03078002	\$325
Rechargeable battery (Approx. 80 hrs)	ECEB-6V	\$20

The SW display unit (SW-D) is as an IP69K indicator with touch sensitive capacitive keys to ensure permanent waterproofing in damp/wet environments. The SW indicator has 5 step comparator lights and can also be used with platform scales other than A&D's. Capacity and division can be freely set.



Specifications	SW-D DISPLAY
Price (ex GST)	\$1,380
Part Number	06162100
Power	AC Mains Rechargeable battery (included)
Bracket	Not Included
Dimensions	255(W) x 134(D) x 178(H) mm



**SW-D IP69K
INDICATOR
NON TRADE**

Accessories	Part Number	Price (ex GST)
OP-03 RS232C serial interface	06162001	\$380
OP-04 RS422 / 485 interface	06162002	\$380
OP-11 Bench/Wall bracket	06162004	\$220
Rechargeable battery (Approx. 90hrs)	ECEB-6V-YUASA	\$40

The SC display Indicator (SC-D) is as an IP68 completely sealed indicator to ensure permanent waterproofing in damp/wet environments. The SC indicator can be submersed in up to 1m of water for 24 hours. Capacity and divisions are: 3kg x 0.0005kg, 6kg x 0.001kg, 15kg x 0.002g, 30kg x 0.005g, 60kg x 0.01g, 150kg x 0.02g (other capacities available)



Specifications	SC-D DISPLAY
Price (ex GST)	\$510
Part Number	06163800
Power	6 x D size batteries
Bracket	Not Included
Dimensions	250(W) x 178(D) x 170(H) mm



SC-D bracket
option



**SC IP68
INDICATOR
NON TRADE**


Accessories	Part Number	Price (ex GST)
SCSE OP-02 Quick USB Interface (cable not included)	06160401	\$220
SCSE OP-03 RS-232C + Comparator relay output	06160402	\$325
SC-D OP-04 Wall/Desk mounting bracket	06163810	\$90

HC-i Series


Precision Counting Scales



**BEST
VALUE**

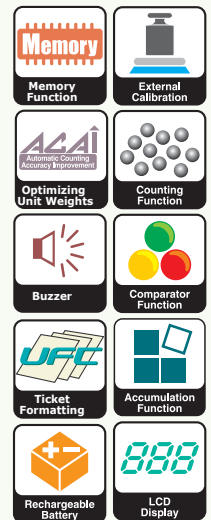

Options



- Three methods to initialize unit weights: sample, memory, and keyboard input
- Large memory for 99 products incl. Tare, Unit weight and Comparator limits
- Navigation system with LEDs indicating active keys for easy and faster operation
- Comparator with HI (exceeding), OK, and LO (insufficient) results
- Accumulation function totals piece count into memory
- High internal resolution 1/600 000 or 1/750 000 & Ability to count small objects down to 0.005g
- Beeping function with frequency variation as you approach your preset target
- UFC: easy formatting of your RS-232C outputs and labels for printers
- Length of extension cable is 60cm


Specifications	HC-3Ki	HC-6Ki	HC-15Ki	HC-30Ki
Price (ex GST)	\$505	\$505	\$505	\$505
Part Number	06012600	06012700	06012800	06012900
Calibration	External	External	External	External
Capacity	3kg	6kg	15kg	30kg
Resolution	0.5g	1g	2g	5g
Min Piece Weight (fine)	0.005g	0.01g	0.02g	0.05g
Dimensions	315(W) x 331(D) x 126(H) mm			
Pan Size	300mm x 210mm			
Power Supply	AC Adaptor TB-S200A or rechargeable battery included			

Accessories	Part Number	Price (ex GST)
Serial Cable DIN Male to DB9 Female	03000002	\$55
HCi OP-03 RS232C Serial Data Interface	06012003	\$185
HCi OP-04 RS232C + Relay Output	06012004	\$240
HCi OP-08 Extension Cable (2m)	06012008	\$110
Rechargeable Battery (Approx. 80hrs)	ECEB-6V	\$20



FC-i / FC-Si Series

High Performance Counting Scales

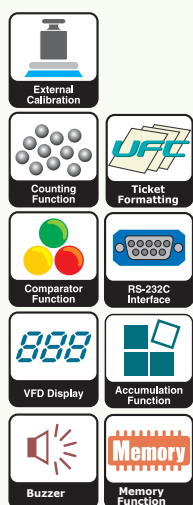

Simple operation and easy to read
Vacuum Fluorescent Display



FC-5000i

Options



- High internal resolution:
1/10 000 000(FC-Si) and 1/1 000 000(FC-i)
- Up to three RS-232C ports
- FC-Si models come with SHS sensor
- Four methods to initialize the unit weight:
sample, memory, keyboard input, and bar code reading
- Automatic counting accuracy improvement (ACAI)
- Comparator with HI (exceeding), OK, and LO (insufficient) results
- Accumulation function totals piece count into memory
- Remote platform option offers bulk counting
- Large memory for up to 500 IDs (ID, unit weight, tare, comparator limit)
- Navigation system with LEDs indicating active keys for faster operation

FC-Si with optional
traffic light and
optional comparator
relay interface



Specifications	FC-500Si 	FC-5000Si 	FC-5000i	FC-10Ki	FC-20Ki	FC-50Ki
Price (ex GST)	\$2,815	\$2,815	\$2,360	\$2,360	\$2,360	\$2,360
Part Number	06020100	06020200	06020400	06020500	06020600	06020700
Calibration	External	External	External	External	External	External
Capacity	500g	5kg	5kg	10kg	20kg	50kg
Resolution	0.02g	0.2g	0.5g	1g	2g	5g
Min Piece Weight (fine)	0.00005g	0.0005g	0.005g	0.01g	0.02g	0.05g
Dimensions	330(W) x 462(D) x 106(H)mm		330(W) x 462(D) x 117(H) mm			
Pan Size	128x128mm	165x165mm	300mm x 280mm			
Power Supply	AC Adaptor TB-S139 (included)					

ex Japan

Accessories	Part Number	Price (ex GST)
Serial Cable DB9 Female to DB9 Female	03000007	\$55
FCi OP-01 Barcode Reader	06020105	\$545
FCi OP-03 Dual Channel RS232C	06020101	\$610
FCi OP-04 RS232C & Comp/Relay Output	06020102	\$610
FCi OP-05 Remote Scale Connector	06020103	\$435
FCi OP-02 NiMH Battery Pack (Approx. 10 hrs)	06020104	\$870



100% Inspection. We can now bring our mobile showroom to you.



Custom Inspection Systems

Heavy Duty and Customised Solutions



- **Custom-made size and capacity 5-500kg**
- Medium Speed - Maximum 60p/min
- Full colour touch screen LCD
- Robust Stainless Steel Design - IP65 available
- Designed and Manufactured in Australia
- Designed to meet the requirement of HACCP

- Easy cleaning and maintenance
- A&D Japan's controls and DSP technology
- Ethernet and Modbus communication
- Up to 1000 product IDs with images
- Programmable digital I/O
- Various custom solutions available

Please Contact A&D for full specs and options

EZI-CHECK

Dynamic and Gravity Rollers



Drawing showing column option



Dynamic Roller



Gravity Roller

**AUSSIE
MADE**

Specifications	Dynamic Roller (AUTO)	Gravity Roller (BASIC)
Price (ex GST)	\$10,050	\$5,000
Part Number	03051085	03051080
Weighing Capacity	30kg / 60kg / 150kg	30kg / 60kg / 150kg
Resolution	0.01kg / 0.02kg / 0.05kg	0.01kg / 0.02kg / 0.05kg
Conveyor	Powered rollers with PLC control	Heavy duty steel gravity rollers
Dimensions	600 (L) x 450 (W) x 900 (H) mm	
Indicator	Water & dust proof FS-i indicator	
HI / GO / LO	Built in traffic lights	
PC Interface	Wired or wireless options available	

The EZI-Check Auto Dynamic Roller & Basic Gravity Roller scales are freestanding, roller weighing systems that can be incorporated into new or existing production lines allowing precise checking of cartons for missing or damaged products, providing peace of mind.

Accessories*

	Part Number	Price (ex GST)
Column option to suit the EZI-Check Roller Systems	03051081	\$350

AD-4991

ProteX X-Ray Systems



PROTEX
SERIES

**Bringing Innovation
to Inspection!**

- Increased consumer protection
- Brand protection and recall prevention
- Food safety compliance
- Tungsten Shielding Curtain
- Advanced Algorithms
Built for more than just containments, we also provide mass estimation, shape detection, and component verification
- Compact Design
Our equipment is the smallest in class to allow for easy in-line integration with minimal reconfiguration of existing equipment
- Easy to Read Display
A 15-inch color touchscreen provides users with a vibrant screen for viewing high-resolution imagery
- Streamlined Product Setup
Minimal inputs from the user makes setup and changeover quick

Specifications	AD-4991-2510	AD-4991-2515	AD-4991-3530
X-Ray Output	100W (50kV_2mA)	150W (50kV_3mA)	300W (75kV_4mA)
Conveyor Speed	10 to 45m / min	10 to 70m / min	10 to 45m / min
Weight	About 90kg	About 105kg	About 135kg
Conveyor Width	250mm		350mm
System Length	800mm		800mm
Conveyor Height	720mm - 860mm		
Max. Capacity	5kg (dependent upon speed)		
IP Rating	IP66 water & dust proof		
No. of recorded items	1000 items (10 groups x 100 items)		
Connectivity	Serial and Ethernet Comms, and multiple digital I/O		
Beam Diagram			

Model	Part Number	Price (ex GST)
ProteX AD-4991-2510 X-Ray system 100W, max. 45m/min	03058000	POA
ProteX AD-4991-2515 X-Ray system 150W, max. 70m/min	03058100	POA
ProteX AD-4991-3530 X-Ray system 300W, max. 45m/min	03058200	POA
ProteX X-ray Test cards	Various	\$135


AD-4961 600g / 2000g

Intelligent Checkweighers



- Full colour touch screen LCD
- Up to 400 packs per minute
- Up to 1000 product IDs with images
- Save data/graphs direct to USB memory sticks
 - A&D's original, automatic adjustment function enables easy product parameter settings or adjustments
- High speed, Digital Signal Processing (DSP)
- Dual range 2kg model. The checkweigher's weighing range and resolution can be selected from 500g x 0.01g or 2000g x 0.1g
- Meets the requirements of hygienic food processing
- Stainless steel frame construction meets IP65 requirements
- Easy switch to another production batch with minimal downtime
- Full interaction via MODBUS ethernet comms

Air Jet Rejector
(two air nozzles)
Requires air compressor with
Ø10mm air tube.
Supply: 0.5Mpa,
2.6NL/time



Flipper/Diverter Module




Drop Conveyor Module



Specifications	AD-4961-600	AD-4961-2KD	
Capacity	600g	500g	2000g
Resolution	0.01g	0.01g	0.1g
Repeatability 3σ	±0.08g	±0.08g	±0.18g
Max weighing speed	400 pcs / min	320 pcs / min	
Max belt speed	15-120m/min Urethane belt		
Belt Size	120(W) x 240(L) mm	200(W) x 350(L) mm	
Max. product dimensions	120mm(W), 22-200mm(L)	200mm (W), 30-300mm (L)	
Display	7inch colour LCD Touch Panel		
Recorded items	1000 items (10 groups x 100 items)		
Sealed USB port (IP-65)	USB 2.0 (memory & upload)		
Serial interface	RS232C or RS485 available		
Ethernet	10 Base-T/100Base-T Auto-MDIX		
Modbus	Modbus RTU & TCP available		
Dimensions	602(W)x660(L)x710-860(H)mm	660(W)x700(L)x710-860(H)mm	
Water/Dust resistance	IP65 Stainless Steel		
Power Supply	AC 100-240V With Emergency Function		

OP-11
Breeze Break option



AD4413-CW
Indicator with
7" colour LCD
touch panel



Model	Part Number	Price (ex GST)
INTELLIGENT 600g x 0.01g Checkweigher (up to 400ppm)	03057000	POA
600g dual air reject module	03057100	POA
INTELLIGENT 2kg x 0.01g Checkweigher (up to 320ppm)	03055000	POA
AD-4413-CW heckweighing Indicator only (NEW!)	03057030	POA
Drop Conveyor module	03055020	POA
2kg dual flipper rejector module	03055010	POA
2kg dual air rejector module	03057200	POA
OP-20 leg extension feet set (for >850mm lines; limit 1020mm)	03055082	\$250
OP-01 display column stand	03055070	\$550
Patlight tower light and mtg plate option	06138879	\$360 nett
OP-02 tower Lights	06138877	\$120 nett
OP-11 breeze break	03055074-A	\$950
OP-14 product guides (pair)	03055080	\$650
CW PLUS data capture and reporting software	06086017	POA
WinCT Plus multi scale data capture & import utility (LAN/Serial)	Please enquire	POA

Please Contact A&D - Special Pricing Applies

AD-4961 6kg

6kg Capacity Checkweigher



- The AD-4961-6K weighing capacity is 6000g x 0.1g
- Full colour 7 inch panel touch screen LCD display
- Save data/graphs direct to USB memory sticks
- High speed, Digital Signal Processing (DSP)
- Meets the requirements of hygienic food processing
- Stainless steel frame construction meets IP65 requirements
- Up to 145 packs per minute
 - Up to 1000 product IDs with images
 - "Flat pack" ease of transport and setup
- Easy switch to another production batch with minimal downtime
- Full interaction via MODBUS ethernet comms



Specifications	AD-4961-6K
Capacity	6000g
Resolution	0.1g
Repeatability 3σ	±1.5g
Max weighing speed	145 pieces / min
Max belt speed	15-80m/min Urethane belt
Belt Size	300(W) x 500(L) mm
Max. product dimensions	300mm (W), 80-450mm (L)
Display	7inch colour LCD Touch Panel
Recorded items	1000 items (10 groups x 100 items)
Sealed USB port (IP-65)	USB 2.0 (memory & upload)
Serial interface	RS232C or RS485 available
Ethernet	10 Base-T/100Base-T Auto-MDIX
Modbus	Modbus RTU & TCP available
CW Dimensions	736(W) x 1005(L) x 720-870(H) mm
Push Rejector Dims	945(W) x 502(L) x 850(H) mm
Water/Dust resistance	IP65 Stainless Steel
Power Supply	AC 100-240V with Emergency Function

Push Rejector



Model	Part Number	Price (ex GST)
Checkweigher 6kg x 0.1g (up to 145ppm)	03055800	POA
6kg push rejector module	03055900	POA
AD4981-2570 3kg single channel flipper	03055100	\$950
AD4981-2570-21 Extra arm	03055110	POA
Product guides for 6kg	0305-149721G	POA
Breeze break to suit 6kg module	03055075-E	POA
Patlight Tower Lights & mtg plate option	06138879	\$360 nett
Motor Assembly 6kg (new)	7PA-4961-MO2	\$850
Motor Assembly 2kg (new)	1BCA4961-MO1	\$750
Drive Motor PCB control card for all models	PZ6229 V005	\$650
Motor Control PCB MD (Version 2)	7PZ-6644-CK	\$650

Please Contact A&D - Special Pricing Applies

AD-4971






Metal Detector



Customised sizes available

Specifications	AD-4971
Max belt speed	10-60m/min Urethane belt
Belt Size	350mm: 250(W) x 800(L) 450mm: 350(W) x 800(L)
Display	7inch colour LCD Touch Panel
Conveyor length	800mm
Conveyor speed	10 - 60m/min
No. of recorded items	1000
Ethernet	10 Base-T/100Base-T Auto-MDIX
Modbus	Modbus RTU & TCP available
350 Dims (100mm)	625(W) x 800(L) x 1050~1200(H) mm
350 Dims (170mm)	625(W) x 800(L) x 1118~1268(H) mm
350 Dims (250mm)	625(W) x 800(L) x 1198~1348(H) mm
450 Dims (170mm)	625(W) x 800(L) x 1114~1264(H) mm
450 Dims (250mm)	625(W) x 800(L) x 1114~1264(H) mm
Water/Dust resistance	IP65 Stainless Steel
Power Supply	AC 100-240V With Emergency Function

* Detection sensitivity will change depending on product and environmental conditions.
Please prepare a $\phi 4-7$ mm power cable.

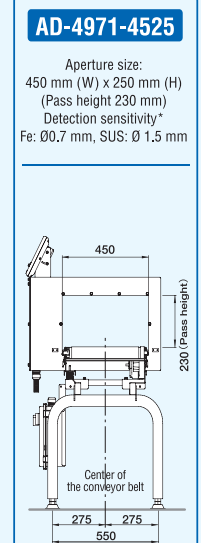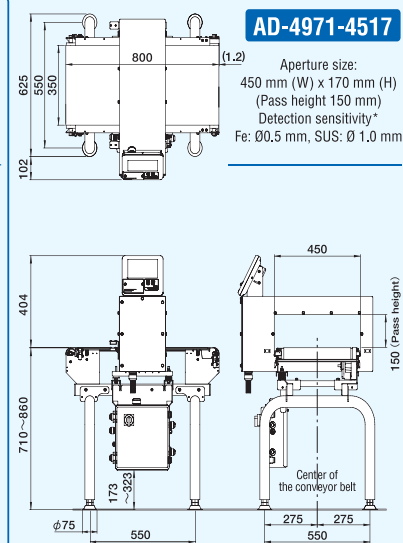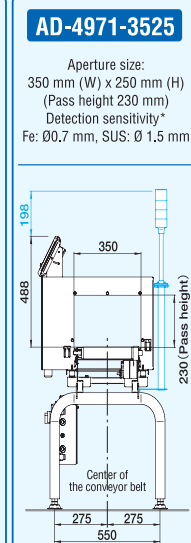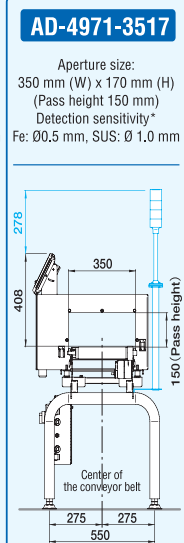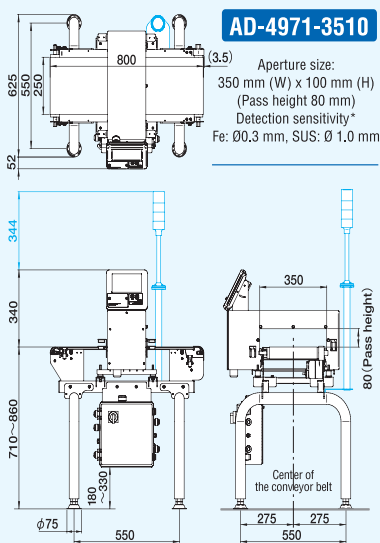

Model	Part Number	Price (ex GST)
In Line Metal Detector 350mm x 100mm aperture	03055500	POA
In Line Metal Detector 350mm x 170mm aperture	03055700	POA
In Line Metal Detector 350mm x 250mm aperture	03055600	POA
In Line Metal Detector 450mm x 170mm aperture	03056100	POA
In Line Metal Detector 450mm x 250mm aperture	03056200	POA
S/S lockable reject bin	03055017-A	POA
Various reject modules available	refer to CW options	POA
EZI-Check Motor Assembly (350mm)	7PM-4971-MO1	\$850
MD test samples with certificates (Fe, non-Fe, SUS304, SUS316)	VARIOUS	\$55 each

Please Contact A&D - Special Pricing Applies

AD-4976

Food Grade Metal Detectors



**NEW
PRODUCT**



**Modular Metal
Detector
head available
seperately**



Specifications	AD-4976
Max belt speed	10-50m/min Urethane belt
Carrying capacity (350W)	5kg (~30m/min) 3kg (30~50m/min)
Carrying capacity (450W)	10kg (10~20m/min) 3kg (40~50m/min)
Display	7inch colour LCD Touch Panel
Conveyor length	800mm
Conveyor speed	10 - 50m/min
No. of recorded items	1000
Ethernet	10 Base-T/100Base-T Auto-MDIX
Modbus	Modbus RTU & TCP available
350 Dims (100mm)	Pass Height: Max 80mm
350 Dims (170mm)	Pass Height: Max 150mm
350 Dims (250mm)	Pass Height: Max 230mm
450 Dims (170mm)	Pass Height: Max 150mm
450 Dims (250mm)	Pass Height: Max 230mm
Water/Dust resistance	IP66 Stainless Steel
Power Supply	AC 100-240V With Emergency Function

* Detection sensitivity will change depending on product and environmental conditions.
Please prepare a φ4-7mm power cable.

● Protected from dust and water to IP66 standards

- Hygienic design considerations
- Suitable for use in HACCP program
- Automatic sensitivity setting function
- Easy operation with 7-inch color touch panel
- Variable belt speed of 10-50m/min
- Standard Ethernet I/O; easy networking via LAN
- Inspection history function with the ability to record 100 inspection results in the internal memory
- Capacity can be increased by using USB memory
- Cleaning and maintenance is simple with a detachable conveyor belt (width 350mm; length 800mm)
- Available in a head only configuration and can be mounted vertically for use in bottling applications

Model	Part Number	Price (ex GST)
DeteX In Line Metal Detector 350mm x 100mm aperture	03055550	POA
DeteX In Line Metal Detector 350mm x 170mm aperture	03055660	POA
DeteX In Line Metal Detector 350mm x 250mm aperture	03055670	POA
DeteX In Line Metal Detector 450mm x 170mm aperture	03055690	POA
DeteX In Line Metal Detector 450mm x 250mm aperture	03055680	POA
S/S lockable reject bin	03055017-A	POA
Various reject modules available	refer to CW options	POA
Motor Assembly (350mm)	7PM-4971-MO1	\$850
MD test samples with certificates (Fe, non-Fe, SUS304, SUS316)	VARIOUS	\$55 each

Please Contact A&D - Special Pricing Applies



Label Printers

Thermal Printing



TSC TE210

Plus Thermal Transfer & Direct Thermal (108mm wide) Value Printer




TSC TTP-247

Plus Thermal Transfer & Direct Thermal (108mm wide) Industrial Printer



Easy stand-alone label printing TSC Keyboard option



Examples of programming for labels

ST, +002658.9 g
2019/06/18 14:33:01

***Other labels and programming options available. Please speak to A&D about your requirements.**

Specifications	TE210	TTP-247
Price (ex GST)	\$575	\$740
Part Number	06090828	06090827
Resolution	203 dpi	203 dpi
Print width	108mm	108mm
Print Length	2540mm	2286mm
Weight	2.5kg	2.8kg
Dimensions (mm)	204 (L) x 280(W) x 188(H)	213 (L) x 314(W) x 188(H)

Accessories*	Part Number	Price (ex GST)
Standard Programming per Printer (weight, date, time, company name only)	LB	\$200
102x102mm 625/roll labels	06090826	\$35
102x48mm 1000/roll labels	06090822	\$35
102x25.4mm 2000/roll labels	06090821	\$35
56x25mm 800/roll label	06090811	\$25
56x46mm 1000/roll label	06090812	\$30
RS232 Cable DB9 Male-DB9 Female	03000008	\$55
RS232 Cable DB9 Male-DIN Male	03000009	\$55
TSC Keyboard	Enquire	POA

A&D WinCT Software

Available Software

WinCT Version 5.40 for Balances, Scales & Indicators including RsCom / RsKey / RsWeight

WinCT-Plus Software

AD-1688 Set-up Software

WinCT Viscosity Software

WinCT Moisture Software

LabVIEW® Driver Software

WinCT-UFC for FC-i, HC-i, AD-4405/06/07

WinST Software

WinCT Version 3.00 for Balances, Scales & Indicators including RSWeight feature

Contact your Account Manager for full details

Peripherals

AD-1683 / AD-720Di / Remote Displays / AD-8922A



AD-1683 STATIC ELIMINATOR



- The AD-1683 generates positive and negative ions to eliminate static electricity, which is often the cause of inaccurate weighing.
- Ideal for treating your glassware, petri dishes, samples,...
- Can be easily and safely installed because it requires no high-voltage wiring
- Compact and lightweight.
- Little or no reverse charge is induced by irradiated ions because of its excellent ion polarity balance

Specifications	AD-1683 STATIC ELIMINATOR
Price (ex GST)	\$1,830
Part Number	06087300
Dimensions	112(W) x 92(D) x 40(H) mm
Power supply	TB-S200 (included)

AD-720Di DOT MATRIX PRINTER



- Date and Time
- Dot-Matrix mechanism, statistic function
- Portable and light weight
- Matrix printer with superior readability
- Powered by AC adaptor
- Compatible with all A&D balances and scales and a wide range of other electronic balances, indicators.

Specifications	AD-720Di PRINTER
Price (ex GST)	\$610
Part Number	06088906
Dimensions	174(W) x 141(D) x 86.9(H) mm
Power supply	TB-301

Please specify which cable connection is required when placing your order

Accessories	Part Number	Price (ex GST)
Printer Paper Roll (each)	MAWP-PP-AD7xx	\$15
Printer ribbon	MAET-ECR09	\$46

REMOTE DISPLAYS

AD-8920A Display 13mm digits



TD-3000 Display (IP65) 75mm digits



Connects to A&D's balances and scales using either RS-232C or current loop. ideally suited to any A&D Balance or Scale

Specifications	AD-8920A	TD-3000
Price (ex GST)	\$510	\$795
Part Number	06086700	06086786
Dimensions (mm)	128(W) x 102(H) x 76(D)	447(W) x 141(H) x 174(D)



AD-8922A REMOTE CONTROLLER

The AD-8922A is a remote controller that can be connected to an A&D manufactured weighing instrument using the RS-232C serial interface.

- Displays weighing data.
- Compact and lightweight.
- Remotely controls a weighing instrument with key operations

Specifications	AD-8922A Controller
Price (ex GST)	\$950
Part Number	06087512
Dimensions (mm)	238(W) x 170(H) x 132(D)



Peripherals

AD-1688 / AD-8527 / AD-1687 / AD-1691

AD-1688 WEIGHING DATA LOGGER



Save, Store & Retrieve - EASY!



- Dual Interface to import data from an A&D balance to a PC
- No battery. It receives power directly from the balance or PC
- Large memory: up to 5,000 weighing data sets can be stored
- Internal clock and interval mode

Specifications	AD-1688 WEIGHING DATA LOGGER
Price (ex GST)	\$285
Part Number	09022000

AD-8527 QUICK USB ADAPTOR



AD-8527 does 2 things:

- Transmits weighing data directly via the RS-232C port of an A&D balance or scale to the USB port of a PC
- Makes the data available at application level



- Easy to use - no software or driver installation required
- Eliminates operator errors
- Note: EJ balances require USB to USB cable

Specifications	AD-8527 QUICK USB ADAPTOR
Price (ex GST)	\$285
Part Number	09023000

Accessories

AD-1641 Air Flow Sensor is sold separately.

AD-1687 WEIGHING ENVIRONMENT LOGGER




- Simultaneous and chronological recording of environmental and weighing data.
- Four kinds of environmental data can be added to your records:
 - Temperature (°C / °F),
 - Humidity (%),
 - Barometric pressure (hPa),
 - Vibration (mG)
- Large memory capacity of 10,000 data sets
- Graphic and numeric display of information
- Connects to balance by RS-232C and to PC by USB
- Time stamping of data

Specifications	AD-1687 WEIGHING ENVIRONMENT LOGGER
Price (ex GST)	\$800
Part Number	06037000

Accessories	Part Number	Price (ex GST)
AD-1641 Air Flow Sensor	06036370	POA

AD-1691 WEIGHING ENVIRONMENT ANALYSER



- Easy operation by following step-by-step guidance on a color touch-panel screen
- Daily balance check to confirm that the balance meets proper conditions for use
- Quick glossary for periodic check items
- Documentation of daily/periodic check / calibration results
- Assessment of measurement environment using AND-MEET*1 with the BM series
- Remote balance display and control
- Date and time setting
- Adjustable LCD brightness
- Three kinds of RS-232C cables as standard

Specifications	AD-1691 WEIGHING ENVIRONMENT ANALYSER
Price (ex GST)	Please Enquire
Part Number	06037100

Peripherals

BT Adapters / BT Converters / Remote Display / RS-232-USB



BLUETOOTH CONVERTERS



**AD-8529PC-W
FOR PC**



**AD-8529PR-W
FOR PRINTER**

These bluetooth converters enables the RS-232C connection to be wireless between the measurement device and the PC or the printer.

Specifications	AD-8529PR-W	AD-8529PC-W
Price (ex GST)	\$430	\$430
Part Number	09024010	09024000




**RS-232
TO USB
CONVERSION
CABLE**

This RS-232 (Male) to USB conversion cable can be used in conjunction with the serial data cables for peripheral connection allowing the connection of A&D equipment to devices that will only receive USB.

Specifications	(Male) RS232 TO USB
Price (ex GST)	\$95
Part Number	03000006

SENA BLUETOOTH SERIAL ADAPTER & USB BT ADAPTER

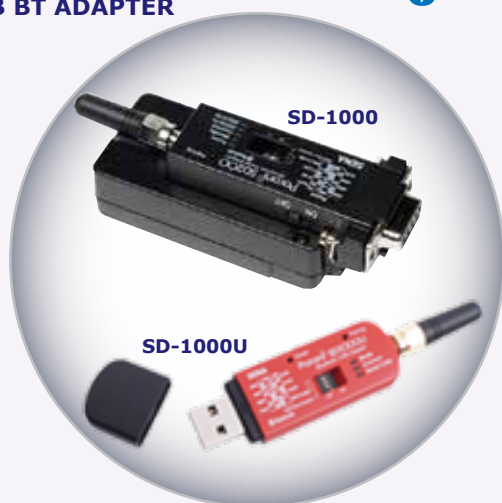

SD-1000

SD-1000U

- Sena SD1000 Long Range Bluetooth Serial Adapter.
- Sena SD1000U Long Range Bluetooth-USB Adapter for Serial Port Replacement.

Specifications	SD-1000	SD-1000U
Price (ex GST)	\$310 (EACH)	\$280 (EACH)
Part Number	06087502	06087508

BLUETOOTH CONVERTOR FOR PC & WIRELESS REMOTE DISPLAY



AD-8541

AD-8931

- Ideal options for use with SJ-WP-BT scales
- Portable and compact units

Specifications	AD-8541	AD-8931
Price (ex GST)	\$185	\$185
Part Number	09024030	06086710

Bluetooth Connectivity Guide




BLUETOOTH CONNECTIVITY

**AD-4406, AD4407, EJ SERIES, GX-A SERIES, GF-A SERIES, FX-i SERIES
FZ-i SERIES, FG SERIES, FS-Ki SERIES, SE SERIES, SC SERIES**

These are a number of A&D products that can interface with bluetooth.
This range can change, so speak to your Account Manager for the full,
current list of bluetooth compatible products.

Moisture Analysers

Fast and Uniform Heating



- **Fast & uniform heating with halogen lamp and innovative SRA technology**
- Sample size up to 70g with SHS (Super Hybrid Sensor) and high repeatability
- Can measure moisture content of up to 0.001% resolution
- Standard WinCT-Moisture software for real-time graph displaying on PC (MS & MX only)
- Up to 20 suitable measurement conditions can be stored and recalled, saving time and minimising errors
- Five programmable modes: Standard, Automatic, Quick, Timer & Manual modes
- Selectable heating modes: Standard, Quick, Step & Ramp modes (ML has Quick & Standard modes only)
- Long life halogen lamp is in protective chamber for easy cleaning and lamps can be easily replaced

Specifications	MS-70	MX-50	MF-50	ML-50
Price (ex GST)	\$7,205	\$4,415	\$3,755	\$2,395
Part Number	06036950	06036900	06036400	06036450
Capacities	71g x 0.0001g	51g x 0.001g	51g x 0.002g	51g x 0.005g
Product Description	400W straight halogen lamp heating system with SRA filter and SHS weighing technology			
Moisture Content Display	0.001%/0.01%/0.1%	0.01%/0.1%	0.05%/0.1%/1%	0.1%/1%
Moisture Content over1g	0.05%	0.10%	0.20%	0.5%
Accuracy (Std.D) over5g	0.01%	0.02%	0.05%	0.1%
Memory Programs	20 sets		10 sets	5 sets
Data Memory Function	100		50	30
Heating Mode (400W max)	Standard/Quick/Step/Ramp			Standard/Quick
Measurement Programs	Standard Mode / Automatic Mode / Quick Mode / Timer Mode / Manual Mode			
Power Supply	AC Mains			

Accessories	Part Number	Price (ex GST)
Serial Cable DB25 Male to BD9 Female	03000001	\$55
MS/MX/MF/ML Halogen lamp (240v 400W)	MAAX-34-240V	\$220
MS/MX/MF/ML Reusable trays (100 pieces) 85mm	MAAX-31PANMXMF	\$295
MS/MX Temperature calibration meter	MAAX-43CALMX	\$1,110
MS/MX/MF/ML Plastic display cover (Pack of 2)	MAAX-38COVERMXMF	\$110
MS/MX/MF/ML 15.66% test sample (30g x 12pcs)	MAAX-33TESTMXMF	\$400
MS/MX/MF/ML 15.66% test sample (each)	MAAX-33TESTMXMF-S	\$40
WinCT-Moisture Software	Please Enquire	\$120
Glass Fibre Sheet (78mm 100pcs)	AX-MX-32-2	\$75



Vibro Viscometers

Unique SV Viscosity Technology

Unique SV Viscosity Technology!



2ml sample
measurements
(SV-1A)



SV-10/100

● With FREE PC Connectivity and Windows graphing software

- Wide measurement range: 0.3 – 10 000mPa-s for SV-10, and 1 000 – 100 000mPa-s for SV-100
- Measure very low viscosities (down to 1/3 of water viscosity!), Temperature measurement from 0 to 160°C
- Fast measurements: 1st result within 15 seconds, and refresh in real time
- Possible continuous measurements in order to characterize changes of state
- High precision with a repeatability of $\pm 1\%$ of displayed value
- Small size sample: cups of 35ml, 13ml, 10ml, and even tubes of 2ml (with SV-1A)
- Possibility to do measurements directly into your containers: beakers, product packages...
- Low mechanical and thermal impact: Preservation of sample characteristics and its texture
- Measurements possible on foaming samples, on foam itself, on flowing or agitated samples
- Simple operation: no configuration - just push on the start button, easy to clean
- Calibration (judgement and even adjustment) of viscosity possible by the user: 1 or 2 points
- Simplified and automated calibration (including adjustment) with pure water (SV-10)

Specifications	SV-1A	SV-10A	SV-10	SV-100
Price (ex GST)	\$11,470	\$11,470	\$9,175	\$9,175
Part Number	06090101	06090102	06090100	06090200
Product Description	0.8-1000 cP / 0.8-1000mPa/s	0.3-10,000 cP / 0.3-10,000mPa/s	0.3-10,000 cP / 0.3-10,000mPa/s	1-100Pa/s
Measurement range	0.3~1000mPa.s	0.3~10,000mPa.s	0.3~10,000mPa.s	1000~100000mPa.s
Measurement units	mPa.s, Pa.s, cP, P	mPa.s, Pa.s, cP, P	mPa.s, Pa.s, cP, P	Pa.s, P
Sample size	2ml~	10ml~	1ml~	1ml~
Temperature range	0~160°C / precision 0.1°C			
Power Supply	AC Adaptor TB-S139 included			

Accessories		Part Number	Price (ex GST)
Serial Cable	DB25 Male to DB9 Female	03000001	\$55
AX-SV-34	10ml Sample cup (10pcs)	MAAX-SV-34	\$285
AX-SV-33	35ml Sample cup (10pcs)	MAAX-SV-33	\$285
AX-SV-58	2ml Sample cup (100pcs)	MAAX-SV-58	\$455
AX-SV-35	13ml Glass Sample Cup	MAAX-SV-35	\$460
AX-SV-36	Vertical Position Lock	MAAX-SV-36	\$335
AX-SV-37	Water Jacket Unit	MAAX-SV-37	\$510
AX-SV-42	Analog Output (0-1V)	MAAX-SV-42	\$1,605
AX-SV-43	5m Display Extension Cable	MAAX-SV-43	\$570

Vibro Rheometers

Tuning Fork Vibro Rheometer Technology



● **NEW! Vibro Rheometer with excellent Sensitivity & Repeatability**

- Repeatability as high as 1% of the measured value (by S.D.) even with low viscosity sample fluids
- Shear rate changes by controlling the sensor plate vibration amplitude
- Easy setup/cleaning and very quick measurement (stabilization in 20 seconds)
- Wide continuous measurement range (max. 0.3 to 25,000 mPa-s)
- Little interference to the sample fluid
- Possible to measure fluids in motion

Specifications	RV-10000A VIBRO RHEOMETER		
Price (ex GST)	\$POA		
Part Number	06090103		
Product Description	Tuning fork vibro method (natural frequency at 30Hz)		
Variable amp. range	0.07 to 1.2mm (peak-to-peak at the tip of the sensor plate)		
Repeatability	1% of the measured value (standard deviation)		
Minimum Display	Range 0.3 to 10 (mPa-s)	Min. Display 0.01 (mPa-s)	Min. Display 0.0001 (Pa-s)
	Range 10 to 100 (mPa-s)	Min. Display 0.1 (mPa-s)	Min. Display 0.0001 (Pa-s)
	Range 100 to 1000 (mPa-s)	Min. Display 1 (mPa-s)	Min. Display 0.001 (Pa-s)
	Range 1000 to 25000 (mPa-s)	Min. Display 10 (mPa-s)	Min. Display 0.01 (Pa-s)
Viscosity Units	mPa-s, Pa-s, cP, P		
Operating Temp.	10 - 40 degrees celcius, 50 - 104 degrees farhenheit		
Minimum sample	10 ml		
Display	Vacuum Fluorescent Display (VFD)		
Communication	RS-232C as standard		
Power Supply	AC Adaptor TB-S139 included		

Accessories	Part Number	Price (ex GST)
AD-1687 Environment logger	06037000	\$800

Testing Products

Pipettes Accuracy Testers



Carry Case



AD-4212A-PT



FX-300i-PT



AD-1690 Leak Tester

- **Save \$\$\$ in unnecessary external Pipette Testing!**

- Very short stabilization times thus increasing the productivity of your pipette calibration activities.
- Compliance with ISO8655 or any other specifications based on the "gravimetric method"

- Standard liquid thermometer and evaporation trap to ensure as precise measurements as possible
- Includes a calibration weight and tweezers for the balance
- Accuracy Testers - Evaporation Trap & Win CT Software included
- AD-1690 Leak tester - Quick 5 seconds test will determine damaged pipettes


Specifications	AD-4212A-PT	FX-300i-PT
Price (ex GST)	\$10,295	\$4,585
Part Number	06090301	06090302
Product Description	Pipette Tester	Pipette Tester
Capacity	110g	320g
Resolution	0.1mg	1mg
Compliance	ISO8655 or other specification based on "gravimetric method"	
Power Supply	AC Adaptor TB-301	AC Adaptor TB-S139

Accessories	Part Number	Price (ex GST)
AD-1690 Pipette Leak Tester	06090303	\$2,640
OP-01 Tube Set (AD-1690)	06090304	\$340
OP-02 Filter Set (AD-1690)	06090305	\$340


AD-1653 / AD-1654

Density Determination Kit

The density determination kits (when combined with an analytical or precision balance) allows the density or specific gravity of a solid or liquid to be measured easily and accurately based on Archimedes' Principle.

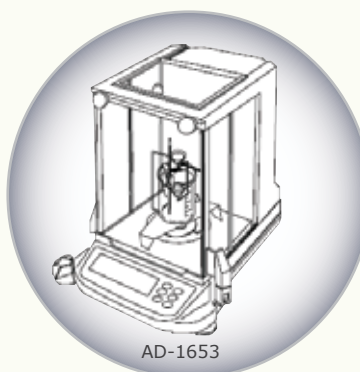

AD-1653

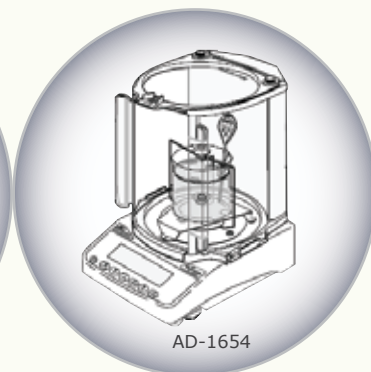

AD-1654

Specifications	AD-1653 DENSITY KIT	AD-1654 DENSITY KIT
Price (ex GST)	\$1,145	\$1,125
Part Number	06036300	06036350
Applicable balances	BM Series / GH Series / GR Series	HR-AZ / HR-A Series / FZ-i Series / FX-i Series


MC Series

Mass Comparator Precision Balances




● Used for Mass Verification

- Precision balance with extended resolution

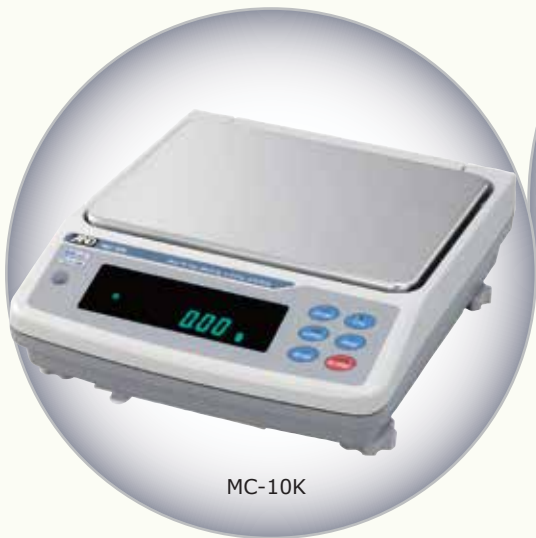

MC-10K

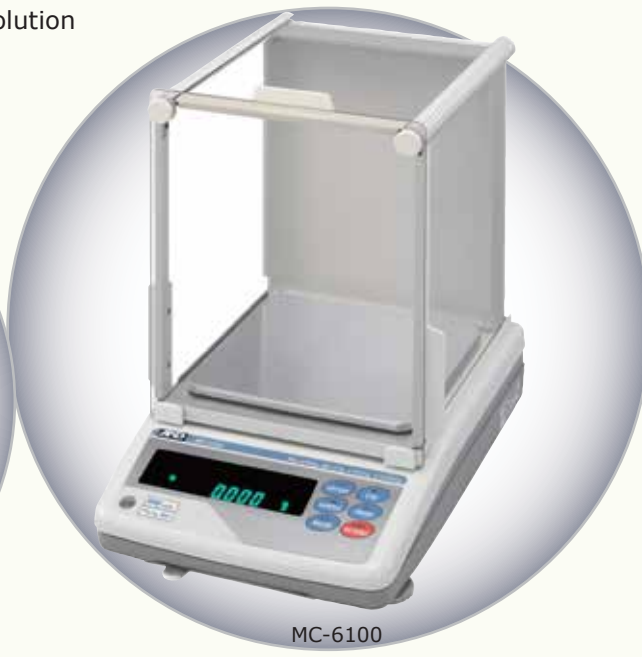


MC-6100

(MC-10K/30K)



(MC-10K/30K)



● Auto-centering pan is included as standard

- Extra decimal place for monitoring fine weight changes with heavy tare weights
- Stabilizing filter to lessen errors due to drafts or vibrations
- Internal calibration mass for simplified calibration of the balance
- Equipped with a glass breeze break (MC-1000/6100) or simple breeze break (MC-10K/30K) as standard
- Fast stabilization of approx. 1.5 seconds
- GLP/GMP/GCP/ISO compliant output
- Large bright vacuum fluorescent display
- Multiple weighing units of measurement



Auto-centering pan realises mass comparison with higher accuracy by correcting eccentric loadings.

Specifications	MC-1000 	MC-6100 	MC-10K 	MC-30K 
Price (ex GST)	\$10,295	\$10,295	\$10,920	\$11,460
Part Number	06036010	06036060	06036000	06036030
Capacity	1100g	6100g	10.1kg	30kg
Resolution	0.0001g	0.001g	0.001g	0.01g
Dimensions	210(W) x 317(D) x 86(H) mm		300(W) x 355(D) x 111(H) mm	
Pan Size	128mm x 128mm	165mm x 165mm	270mm x 210mm	
Serial Cable	DB9 Female to DB9 Female (03000007)			
Power Supply	AC Adaptor TB-S139 included			

ex Japan

Accessories	Part Number	Price (ex GST)
Replacement auto centering pan (MC-10K/30K)	06036001	\$1,605

ex Japan



AD-4212A

Analytical Production Weighing System




Options



Display Unit
(included)

AD-4212A
Weighing Unit

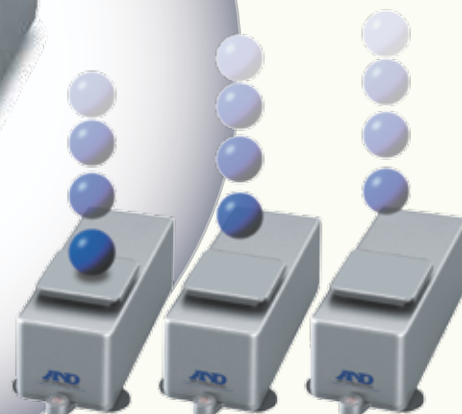

An example of high speed weighing

For maximum efficiency of your production line

Applications such as:

- High-speed weighing
- High-speed check weighing
- Filling & Dispensing
- Isolated weighing

- High resolution and quick stabilization times down to: 1.1 seconds for 0.1mg & 0.8 seconds for 1mg
- Chemically resistant stainless steel sensor unit
- 3-level comparator with contact output and buzzer
- External digital inputs to trigger actions such as RE-ZERO or PRINT
- Data memory, GLP and GMP compliant
- Win CT: software tool for data acquisition from PC
- Multiple weighing units
- VFD screen for easy to read weighing results
- 2m connection cable in between sensor and indicator
- Protection against vertical or transverse shocks - patented

Specifications	AD-4212A-100 	AD-4212A-200 	AD-4212A-600 	AD-4212A-1000 
Price (ex GST)	POA	POA	POA	POA
Part Number	06080310	06080320	06080300	06080330
Capacity	110g	210g	610g	1100g
Resolution	0.0001g	0.001g	0.001g	0.001g
Dimensions	Weighing unit: 80(W) x 230(D) x 90(H); Display unit: 237(W) x 150(D) x 155(H) mm			
Pan Size	50mm x 50mm		70mm x 70mm	
Connection Cable	Approx. 2m between weighing unit and display unit			
Power Supply	AC Adaptor TB-301 included			

ex Japan

AD-4212B

Analytical Production Weighing System



Display Unit
(included)

AD-4212B
Weighing Unit



Options



Ideal for applications such as:

- High-speed weighing
- High-speed check weighing
- Filling
- Isolated weighing

High Speed
Durable
Compact
Precise Filling


- High resolution and quick stabilization times down to: 2.5 seconds for 0.1mg & 4 seconds for 0.01mg
- Standard RS-232C interface
- Chemically resistant stainless steel sensor unit
- 5-level comparator with contact output and buzzer
- External digital inputs to trigger actions such as RE-ZERO or PRINT
- Data memory, GLP and GMP compliant
- Win CT: software tool for data acquisition from PC
- Multiple weighing units
- VFD screen for easy to read weighing results
- 2m connection cable in between sensor and indicator
- Protection against vertical or transverse shocks - patented

Specifications	AD-4212B-101 	AD-4212B-102 	AD-4212B-201 	AD-4212B-301 
Price (ex GST)	POA	POA	POA	POA
Part Number	06080602	06080350	06080800	06080360
Capacity	31g / 110g	110g	210g	310g
Resolution	0.01mg / 0.1mg	0.01mg	0.1mg	0.1mg
Dimensions	Weighing unit: 80(W) x 230(D) x 90(H); Display unit: 237(W) x 150(D) x 155(H) mm			
Pan Size	Ø 34mm		50mm x 50mm	
Connection Cable	Approx. 2m between weighing unit and display unit			
Power Supply	AC Adaptor TB-301 included			



AD-4212C / AD-4212L

Production Line Weighing System



Options



AD-4212C
Module



AD-4212L
Module



Option:
AD-8922A
Display Unit

● AD-4212C Features

- Fast stabilization (0.5 sec. at 1 mg and 1.3 sec. at 0.1 mg)
- Slim size (59 mm width) for installation in narrow spaces
- Direct digital data output to a panel computer, PLC/PC via RS-232C
- High-speed data transmission of up to 50 times/second
- IP65 dust and waterproof construction
- Protection mechanism against vertical and transverse overloading
- Removable levelling feet for direct attachment on the mounting base
- Calibration weight included
- Connection cable included (about 5 m)

● AD-4212L Features

- Powerful vibration cancelling filter
- Strong overload protection
- High-speed sampling 1000 times per second
- Compact size weighing unit
- Fast response time
- Din rail mounting type display unit

Specifications	AD-4212C-301	AD-4212C-300	AD-4212C-600	AD-4212C-3100	AD-4212C-3000	AD-4212L-R50	AD-4212L-R100
Price (ex GST)	POA	POA	POA	POA	POA	POA	POA
Part Number	06080370	06081200	06080900	06081000	06080380	06080200	06080210
Capacity	51g / 320g	320g	620g	510g / 3200g	3200g	51g	110g
Resolution	0.0001g / 0.001g	0.001g	0.001g	0.001g / 0.01g	0.01g	0.001g	0.001g
Dimensions	59(W) x 231(D) x 91(H) mm					35(W) x 101(D) x 110(H) mm	
Pan Size	50mm x 50mm					Ø20.5 mm	
Connection Cable	Approx 10m					Approx 10m	
Power Supply	AC Adaptor TB-301 included					DC 24V +10% - 15%	

ex Japan

Accessories	Part Number	Price (ex GST)
AD-8922A Display Unit	06087512	\$950

AD-4212D

Micro Analytical Weighing Sensor



Precision of high-end laboratory analytical balances to production lines/systems with unprecedented flexibility and utility.

High Resolution, High Stability & Space saving



Options



- Minimum weighing value from 1 μ g
- EM-DLC* technology for direct connection to a PC or PLC
- Compact size and resistance to vacuum state ideal for use in a glove box
- Stable measurement in a fume hood (for 0.1 mg readability only)
- Internal calibration function to ensure accuracy with one key press
- Protection mechanism against vertical and transverse overloading due to actuator malfunctions, etc.
- Adjustable response characteristics to help cope with the effects of drafts and vibrations
- Automatic zero display after data output
- Equipped with a small breeze break
- Possible to design and attach your preferred weighing pan/receptacle
- Clock and calendar function
- Underhook for weighing magnetic materials and density measurements
- GLP/GMP/GCP/ISO compliant output
- Built-in temperature sensor for temperature data output
- AD-1691 weighing environment analyser provided as standard

Specifications	AD-4212D-33 	AD-4212D-32 	AD-4212D-302 	AD-4212D-301 
Price (ex GST)	POA	POA	POA	POA
Part Number	06081110	06081120	06081100	06081130
Capacity	32g	5.1 g / 32 g	320g	320g
Resolution	0.001mg	0.001 mg / 0.01 mg	0.01mg	0.1mg
Dimensions	With breeze break: 167.5(W) x 298(D) x 170(H); Without: 167.5(W) x 298(D) x 90(H) mm			
Pan Size	Ø34 mm		Ø50 mm	
Connection Cable	Approx. 2m between weighing unit and display unit			
Power Supply	AC Adaptor included			

ex Japan



Health Scales



**UC-355
PERSONAL SCALE**

- 250kg capacity with 200g resolution
- Portable and battery operated
- Approx. dims 415(L) x 360(D) x 38(H) mm

Specifications	UC-355 PERSONAL SCALE
Price (ex GST)	\$385
Part Number	09030901
Capacity	250kg*

*UC-355: 100g resolution from 1-100kg & 200g resolution from 100kg - 250kg



**UC-352BLE BT
PERSONAL SCALE**

- 200kg capacity with 200g resolution
- Durable glass plate. Battery Operated
- Approx. dims 300(L) x 300(D) x 30(H) mm
- Bluetooth capability

Specifications	UC-352 PERSONAL SCALE
Price (ex GST)	\$175
Part Number	09018400
Capacity	0-100kg x 100g / 100-200kg x 200g



**PERSONAL
SCALES**

- UC-321 Series with 50g resolution
- UC-502 Personal Scale with 100g resolution
- Portable & Light weight
- Battery Operated

Specifications	UC-321	UC-502
Price (ex GST)	\$295	\$60
Part Number	09030200	09030102
Calibration	150kg x 50g	180kg x 100g
Dimensions	310(W) x 310(D) x 20(H) mm	300(W) x 300(D) x 24(H) mm

**AD-6121A
PERSONAL SCALES**



- 150kg capacity with 100g resolution
- Portable & Light weight
- Battery Operated
- Approx. dims 320(L) x 315(D) x 35(H) mm

Specifications	AD-6121A
Price (ex GST)	\$395
Part Number	09030900
Capacity	150kg x 100g

**AUSSIE
MADE**

Health Scales



**PW-200-FG
PROFESSIONAL PLATFORM SCALE**

- 200kg capacity with 20g resolution
- AC Adaptor (TB-S200A) or battery operated

Specifications	PW-200-FG
Price (ex GST)	\$995
Part Number	03160700
Capacity	200kg x 20g


**HVL-CS
CHAIR SCALE**



Now with
* 220KG CAPACITY *

- 220kg capacity with 20g resolution
- Battery Operated.
- AC Adaptor (TB-S200A). Adaptor not included

Specifications	HVL-CS CHAIR SCALE
Price (ex GST)	\$2,160
Part Number	03040610
Capacity	220kg x 20g

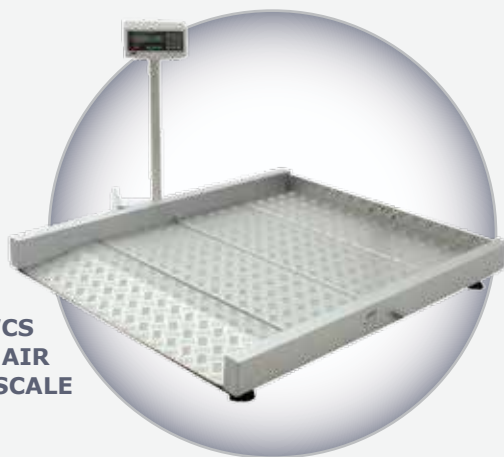


**WCS
WHEELCHAIR
SCALE**

- Highly portable with 300kg capacity
- Suitable for motorised or manual wheelchairs
- AC Adaptor or battery power operated
- Separate indicator for optimal positioning
- Handrail option available

Specifications	WHEELCHAIR SCALE
Price (ex GST)	\$3,795
Part Number	03040810
Capacity	300kg x 50g

**WALK-ON
BARIATRIC
SCALE**

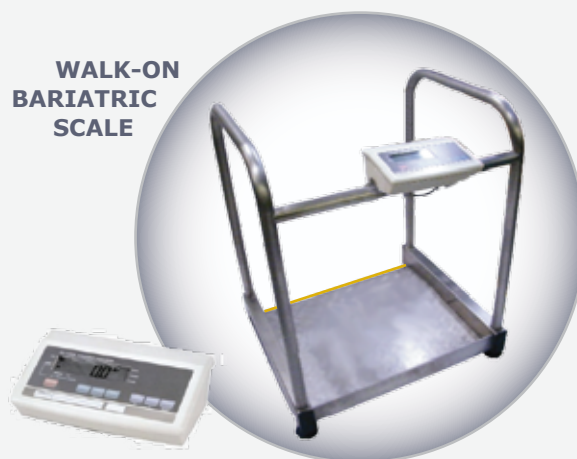

- Large walk on platform: 600mm x 700mm
- High capacity 300kg x 100g
- AC Adaptor or battery power operated
- Easy wipe down with full armrest supports

Specifications	WALK ON BARIATRIC SCALE
Price (ex GST)	\$2,995
Part Number	03040710
Capacity	300kg x 100g

SELECTION GUIDE & SERVICE DETAILS

GRADUATION CAPACITY	<0.00001g	0.0001g < 0.001g	0.001g < 0.01g	0.01g < 0.1g	0.1g < 2g	2g < 5g	5g < 10g	10g < 20g
less than 100g	BM, GR-202 AD-4212B/D	HR-A AD-4212C	EW-i	EW-i	EW-i			
100 <= 500g		BM, GX-A, GF-A, HR-AZ, GH-252, GR, FX-i/WP, FZ-i/WP AD-4212A/B/D	HR-A, EK-i, FX-i/WP EK-EP, FZ-i/WP, GX HT, EJ	EJ, HL-WP, EK-EP EK-i, HT-120	EW-i, HL-WP HT, HT-CL			
500g <= 1000g			GX, FX-i, FZ-i, EJ GX-A, GF-A, EK-i AD-4212A/C	EJ, EK-i, FC-i	FC-i, SJ-HS EW-i, SK-WP HL-WP			
1kg <= 3kg		MC	GX-A, GF-A	GX, GX-A, GF-A	EJ, EW-i, SJ-HS EK-i, SJ-WP SK-WP, HL-WP, SA EK-EP			
3kg <= 5kg			FX-i/WP, FZ-i/WP, GX, GX-A, GF-A	EK-EP, FX-i/WP FZ-i/WP, GX-A GF-A, AD-4212C GX, EK-i, EJ	EJ, EK-EP, EK-i, FC-i EK-L, SJ-HS, SJ-WP SK-WP, HL-WP, HT HT-CL, HV-CEP HVW-C/CP, HV-CWP	SJ SK-WP		
5k <= 10kg			MC	GX, GF-K, GX-A GF-A, FX-i, FZ-i	EK-i, EK-EP, GX GX-A, GF-A HVW-C/CP, GP HC-i, FC-i, SJ-WP SW, FS-Ki	HV-CEP, HVW-C/CP HV-CW, FS-Ki, SW EW-Ki, SJ-HS	SK-WP	
GRADUATION CAPACITY	0.001g < 0.01g	0.01g < 0.1g	0.1g < 2g	2g < 5g	5g < 10g	10g < 20g	20g < 50g	50g < 1000g
10kg <= 30kg	MC	GF-K, GP, EK-L GF-A, GX-A	GF-K, GX-A, GF-A, EK-L, FS-i, FC-i HC-i, HVW-C/CP SJ-WP, EK-EP, EK-i FS-Ki, SW, GP, FG	HC-i, FS-i, SW SK-KWP, HV-CWP FC-i, FG, FS-Ki HV-CEP, SC, SE, EM SJ-WP, HVW-C/CP	HC-i, SJ-WP, SC SE, SW, HV-CEP HVW-C/CP, HV-CWP EM, EW-Ki, SK-WP SJ-HS, FG, FS-Ki	SK-WP, SA, SW SC, SE, SJ-HS, EM FS-Ki		
30kg <= 100kg		MC, GP, GF-K, GX-K	GP, EM, GF-K, GX-K HV-CEP, FG, HV-CWP EK-KL, FS-Ki, SJ-KWP		FG, FC-i	SE, SC, SW, EM, FG HV-CEP, HV-C/CP HW-C/CP, HV-CWP		
100kg <= 150kg			GP			FG, SE, SC, SW, EM	FG	
150kg <= 300kg						HV-CEP, HV-C/CP HW-C/CP, HV-CWP	HV-CEP, HV-C/CP HW-C/CP, HV-CWP	SD-200
>300kg								AD-KA4
>1200kg								ELP-1200, A&D 3000, ELP-3000 Weighbeams
>2000kg								A&D 3000, ELP-3000 Weighbeams
>3000kg								A&D 3000 ELP-3000

service@andaustralasia.com.au

spares@andaustralasia.com.au

T: (08) 8301 8121 | F: (08) 8352 7409

A&D Service hours are 7.30am - 4.00pm weekdays

www.andaustralasia.com.au
sales@andaustralasia.com.au

Head Office & Warehouse
32 Dew Street
THEBARTON
South Australia 5031
Tel: (08) 8301 8100
Fax: (08) 8352 7409

New South Wales Office
Unit 4, 14 Abbott Road
SEVEN HILLS
New South Wales 2147
Tel: (02) 9674 5466
Fax: (02) 9674 2544

Victorian Office
Unit 38, 326 Settlement Road
THOMASTOWN
Victoria 3074
Tel: (03) 9371 1555
Fax (03) 9372 1193